





BIANCO

МОСНА

WHITE



Sandy Series Special Color



Sandy Series S Special Color



APPLICATIONS



URBAN CANTERS



RESIDENTIAL CENTRES



KITCHENS



HOSPITALS



SPORT CENTRES



HOUSES INDOOR



CLINICAL



BATHROOMS



SPAS



SHOPPING PLACES



EXTRENAL WALL COVERING



TRAFFIC AREAS




OUTDOOR



CENTRES FOR CHILDHOOD



SCHOOLS

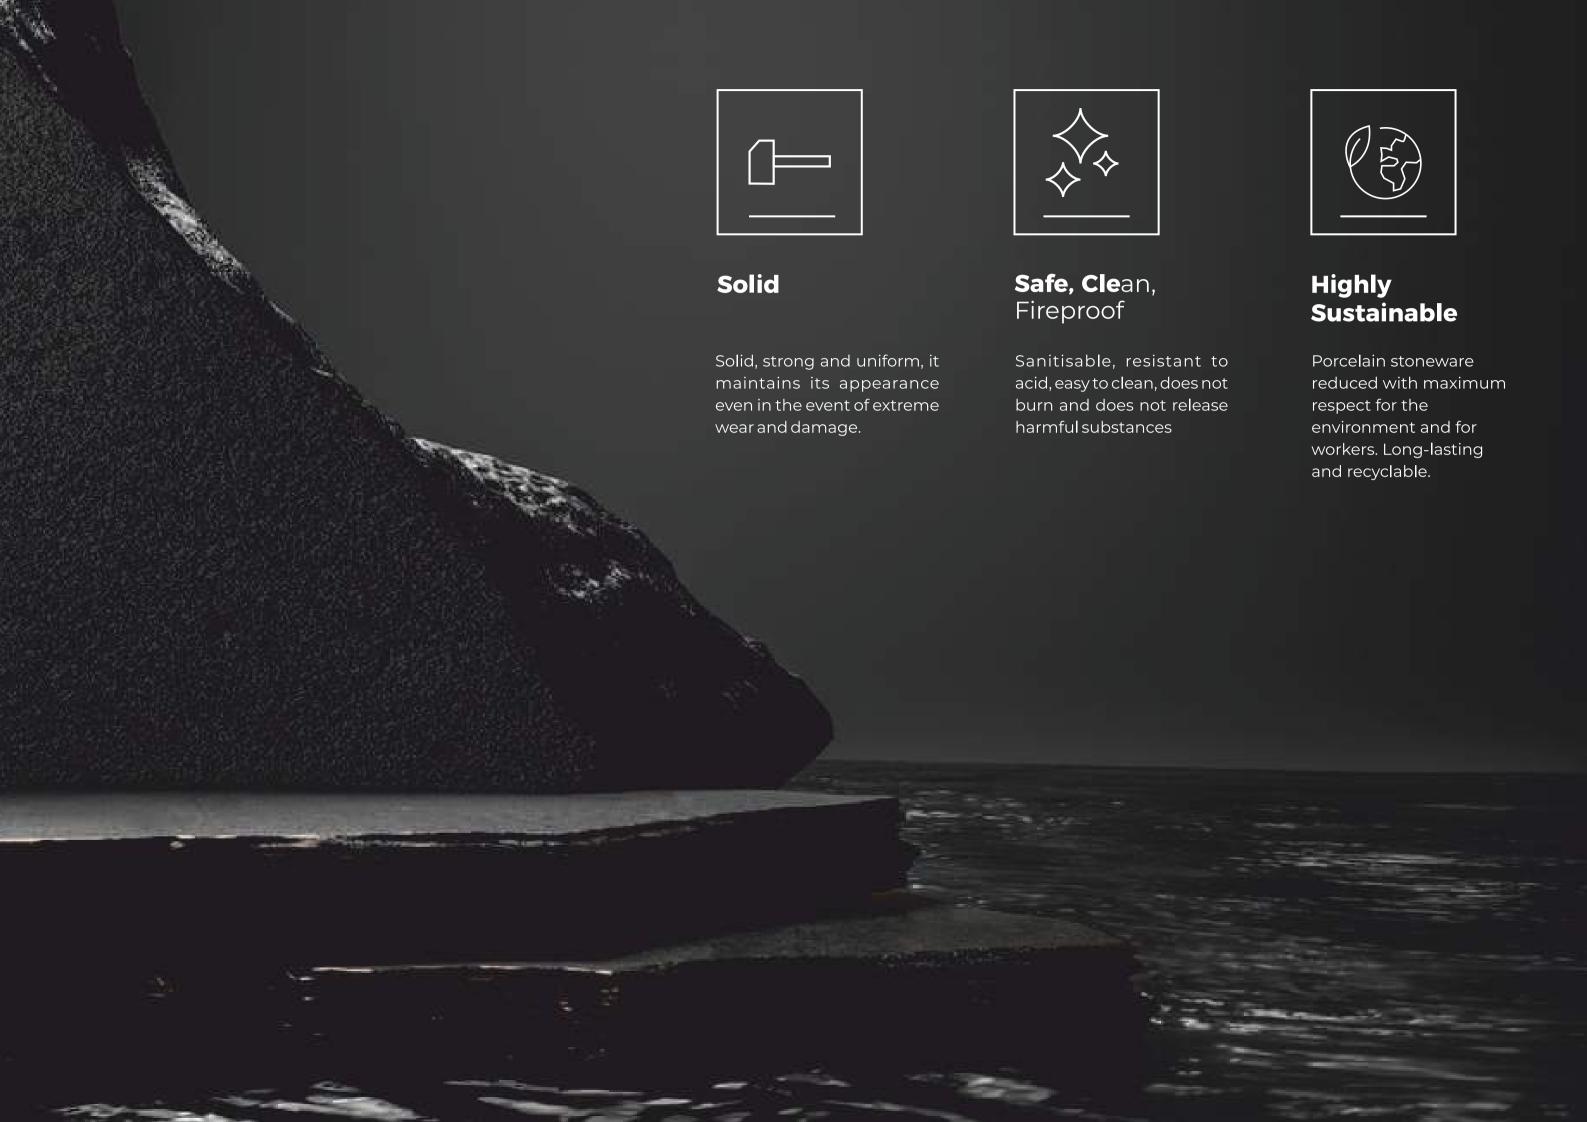





ί̈́γ










SANDY MIST

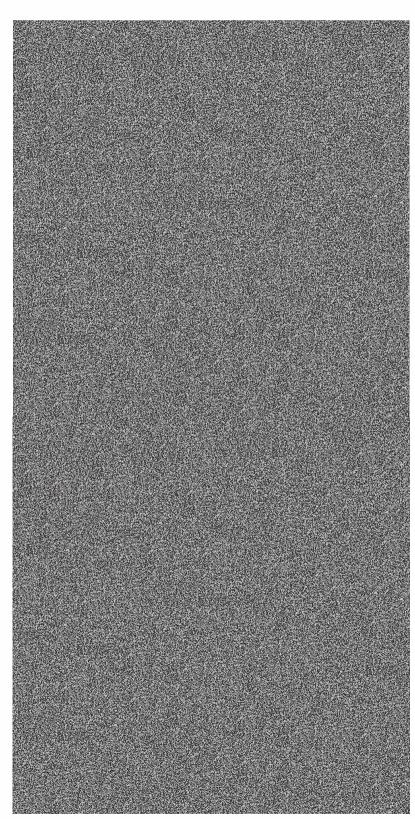

Light **Series**



FORMAT

600 x 600 mm

600 x 1200 mm



SANDY MIST





















()









SANDY MOCHA




Light Series



FORMAT

600 x 600 mm

600 x 1200 mm

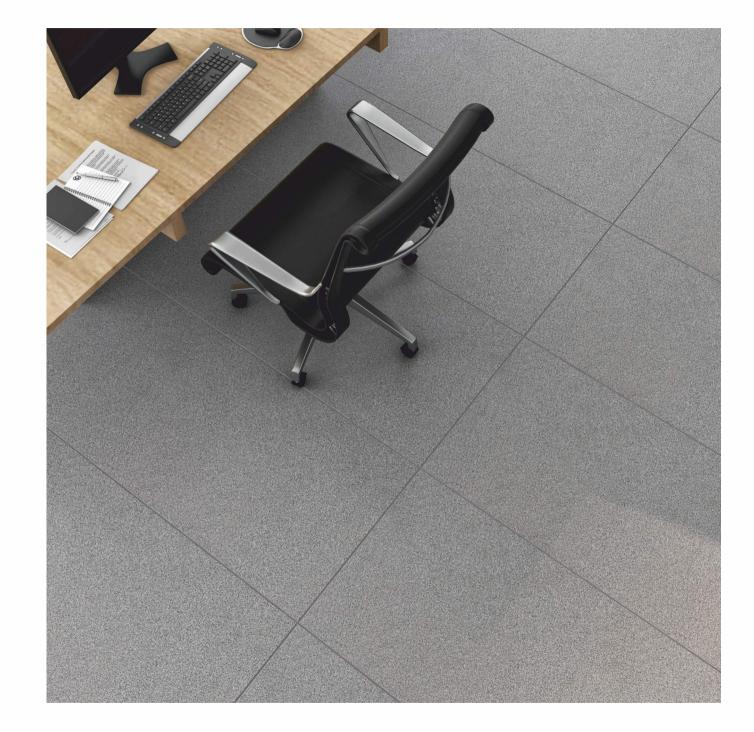



SANDY MOCHA

Available Surface
Satin / Polish

















Water Proof
















SANDY BUTTER

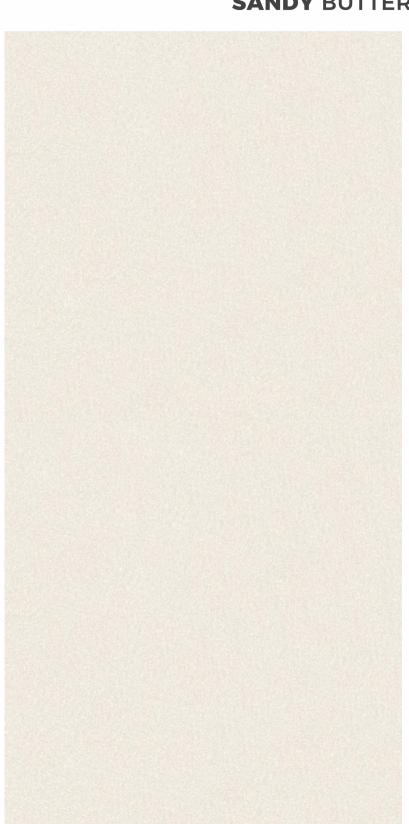

Light **Series**




FORMAT

600 x 600 mm

600 x 1200 mm



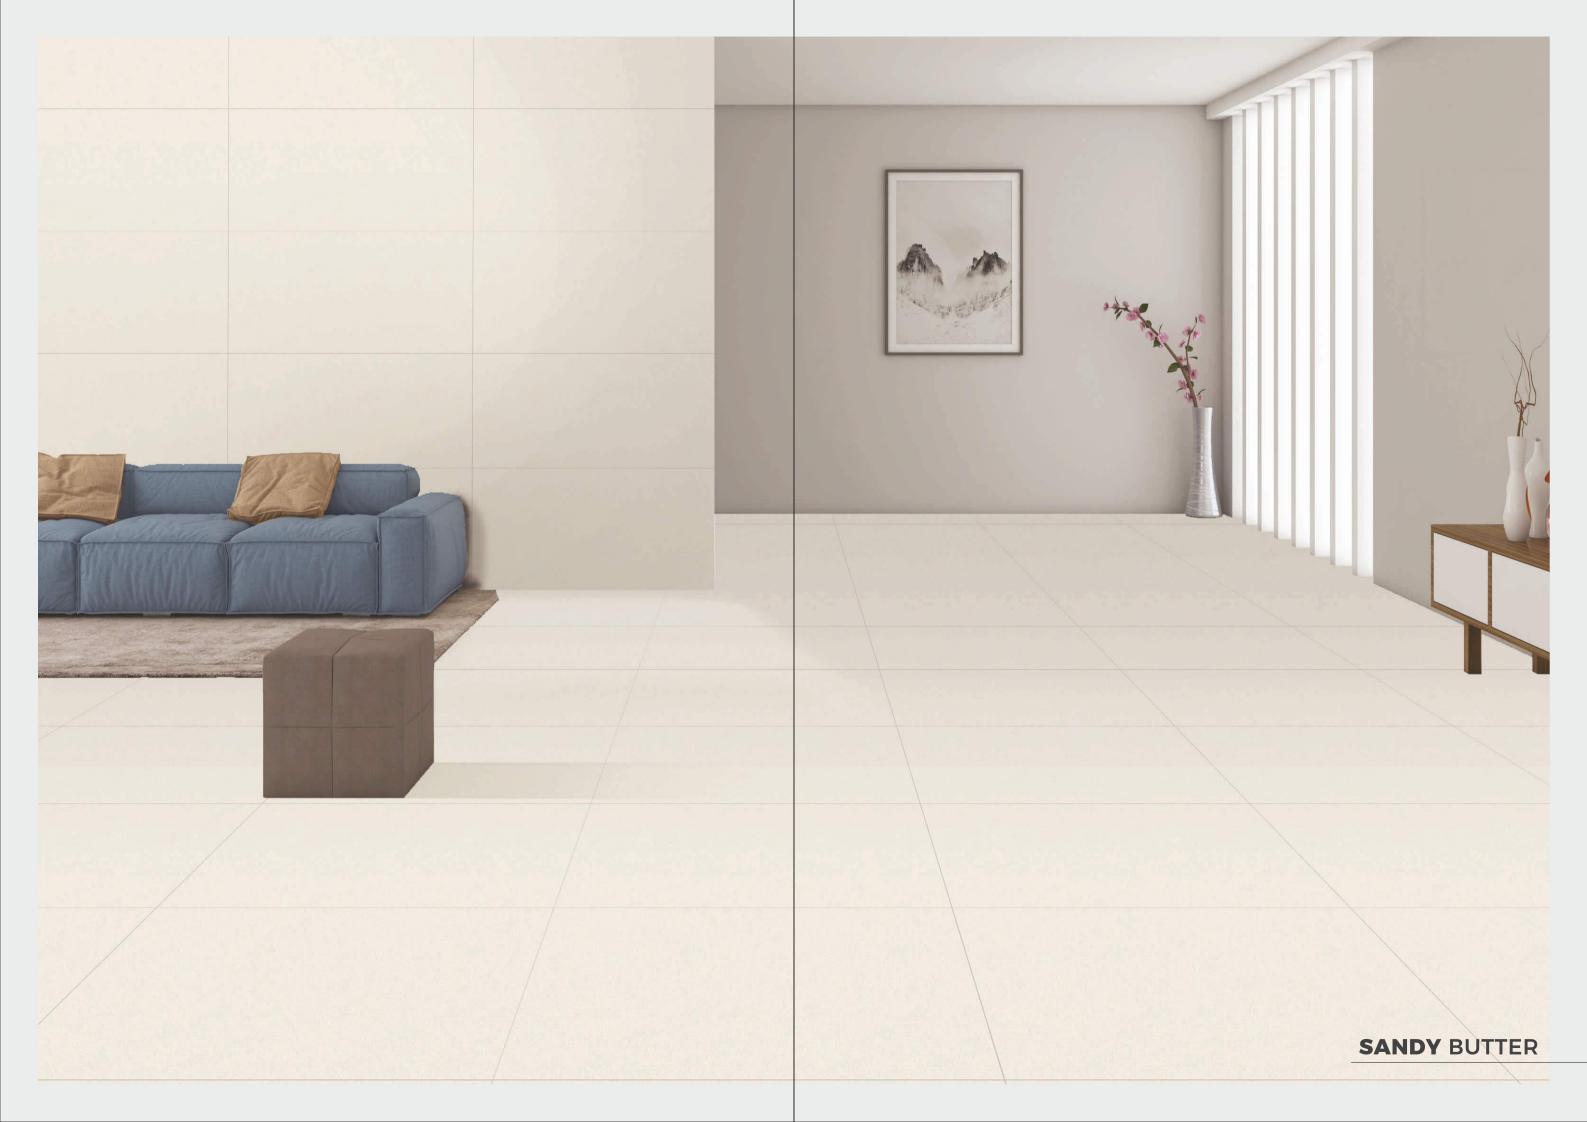

















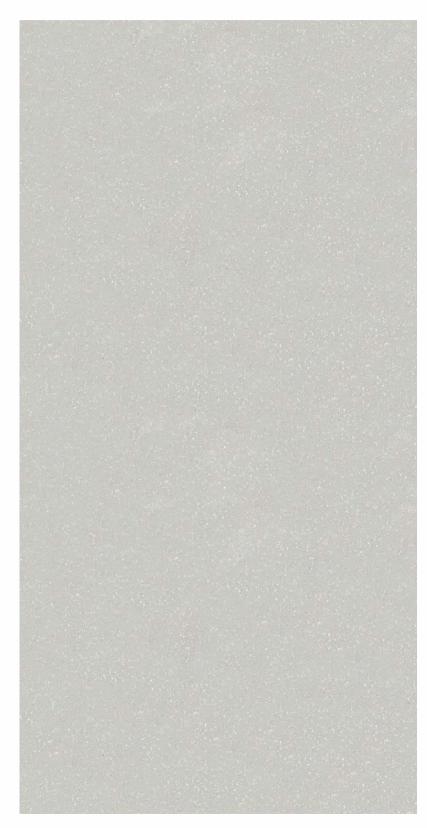

Light Series




FORMAT

600 x 600 mm

600 x 1200 mm



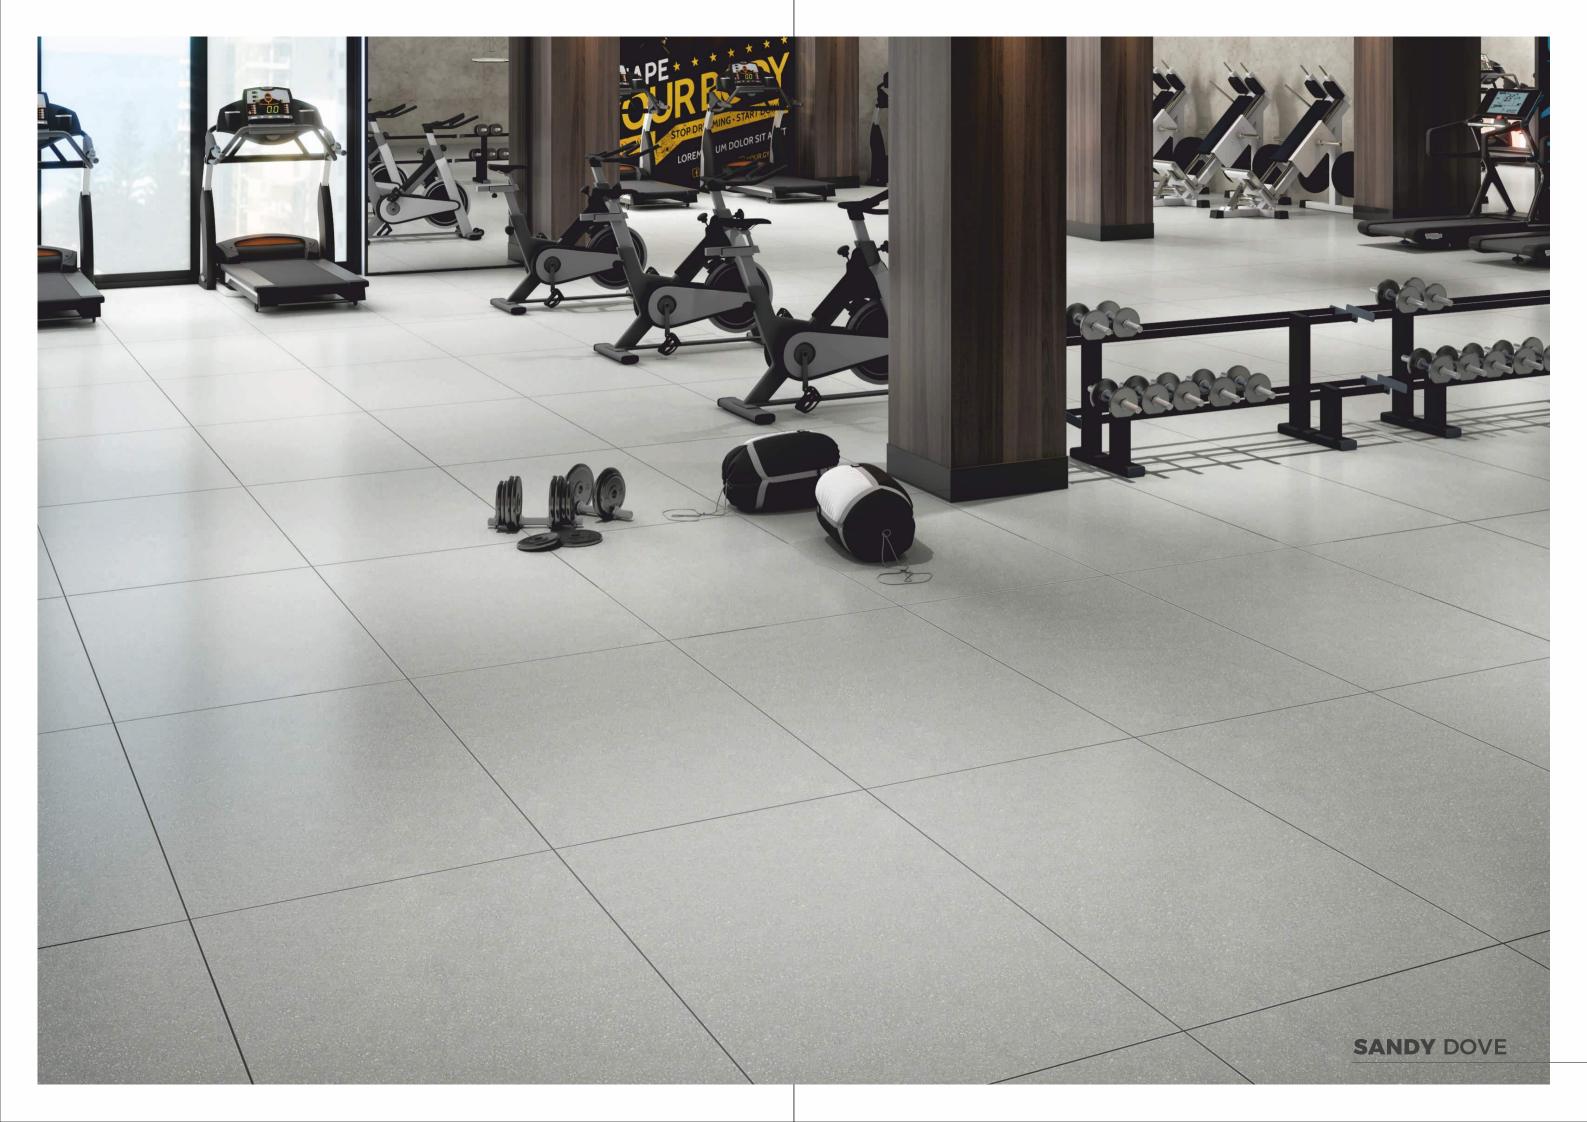













SANDY CREMA



Light Series




FORMAT

600 x 600 mm

600 x 1200 mm



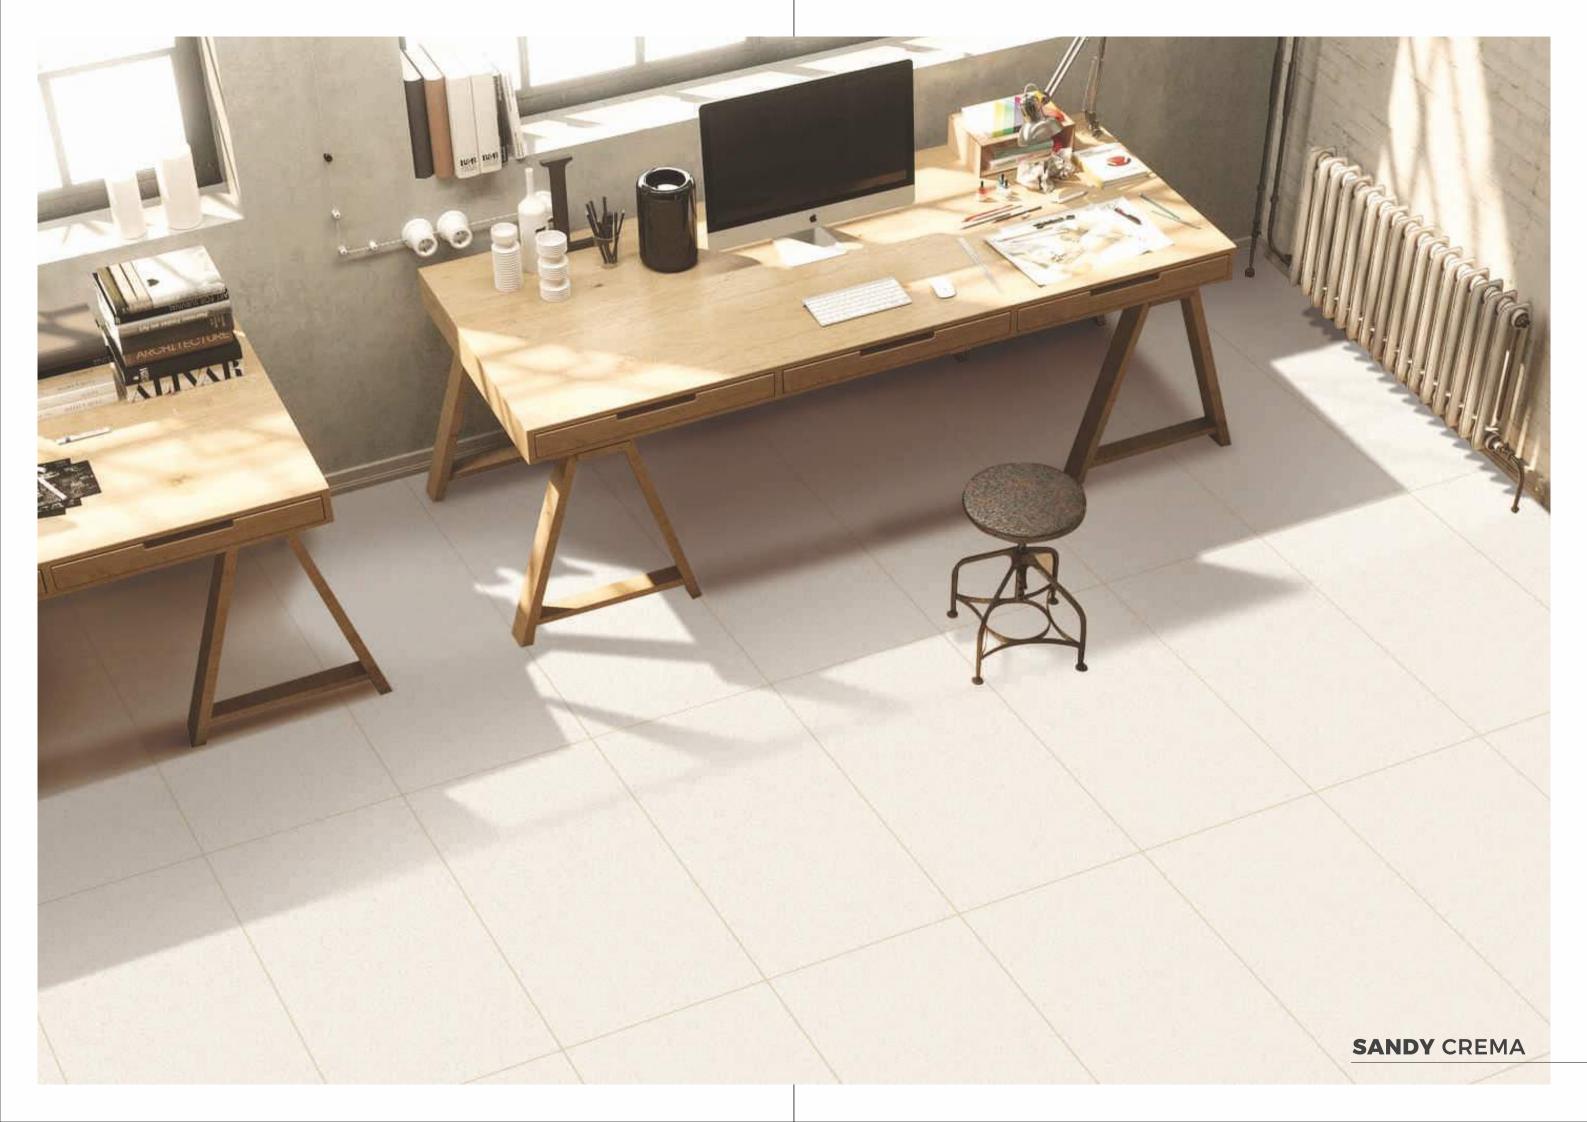
















SANDY BEIGE

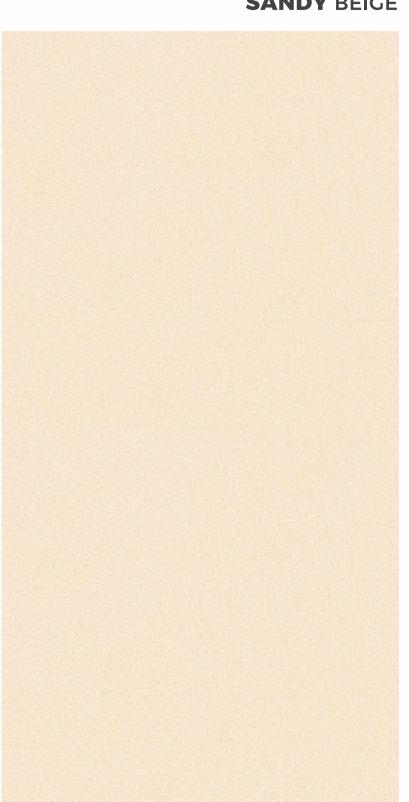

Light Series



FORMAT

600 x 600 mm

600 x 1200 mm


















SANDY BIANCO

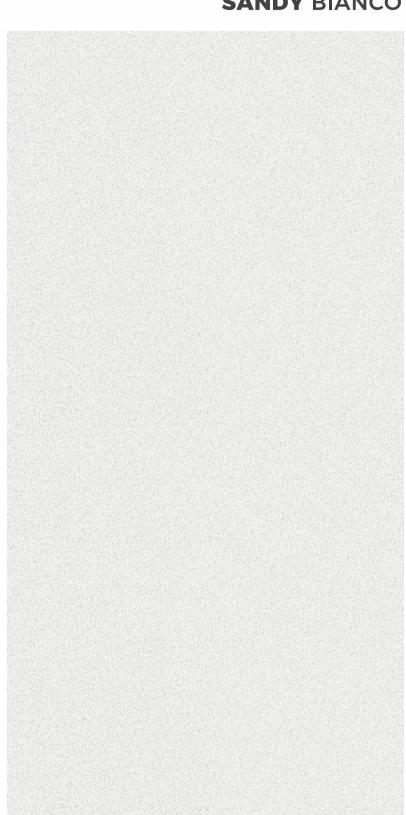

Light Series



FORMAT

600 x 600 mm

600 x 1200 mm



SANDY BIANCO
































SANDY PEARL

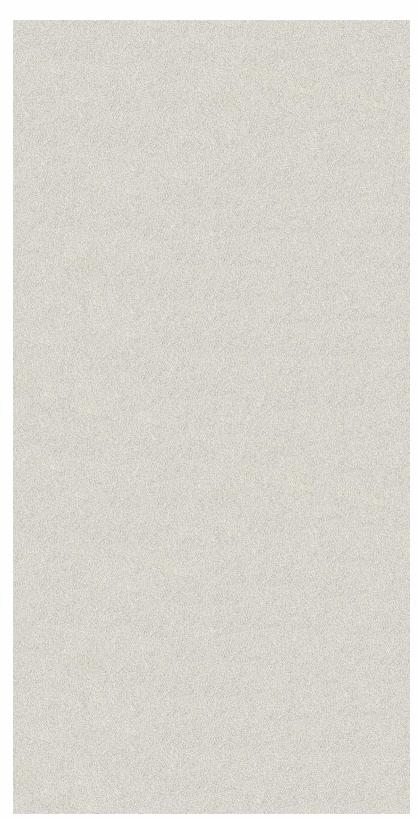

Light Series



FORMAT

600 x 600 mm



SANDY PEARL




























SANDY NERO




Dark Series



FORMAT

600 x 600 mm

600 x 1200 mm

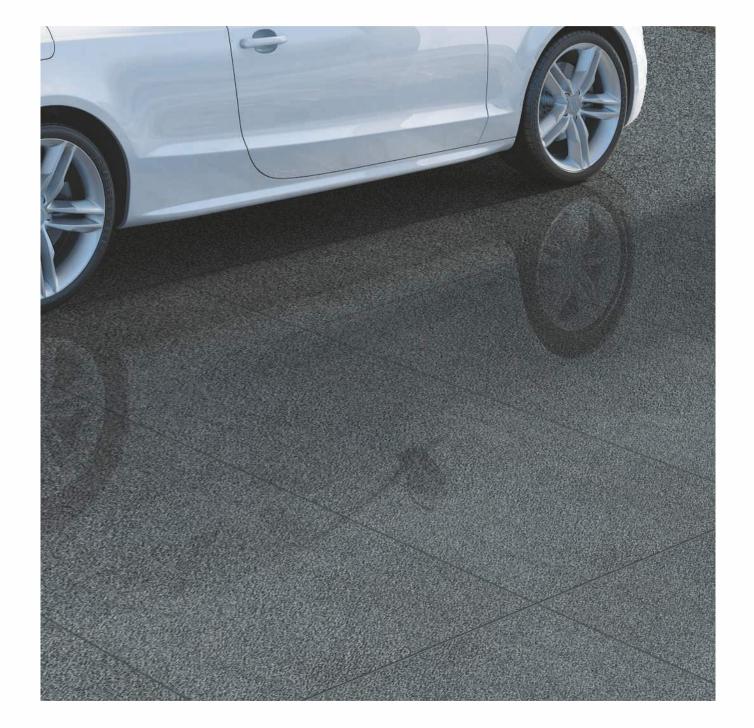

SANDY NERO

















SANDY CHOCO




Dark Series



FORMAT

600 x 600 mm

600 x 1200 mm

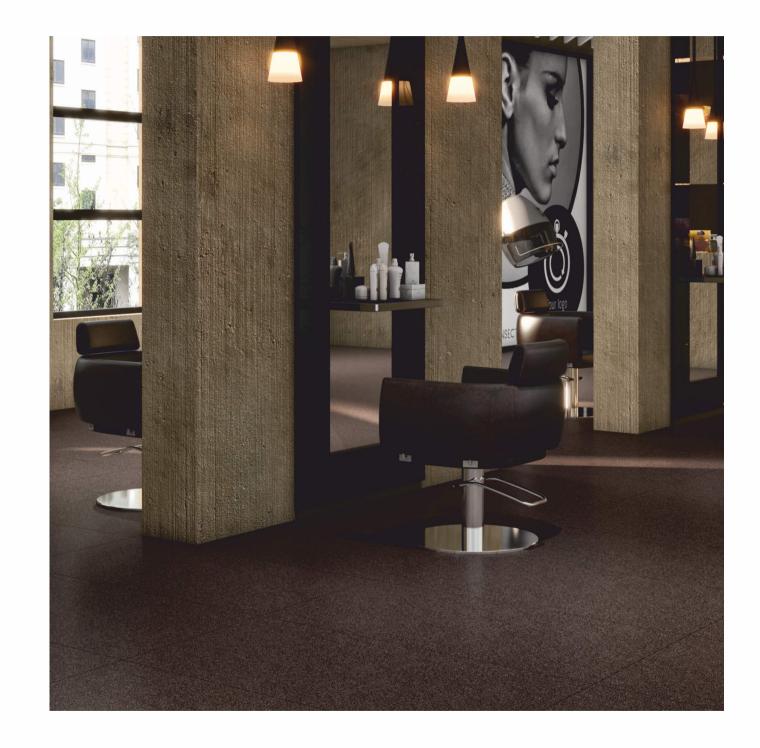

SANDY CHOCO































SANDY COPPER



Dark Series




FORMAT

600 x 600 mm

600 x 1200 mm



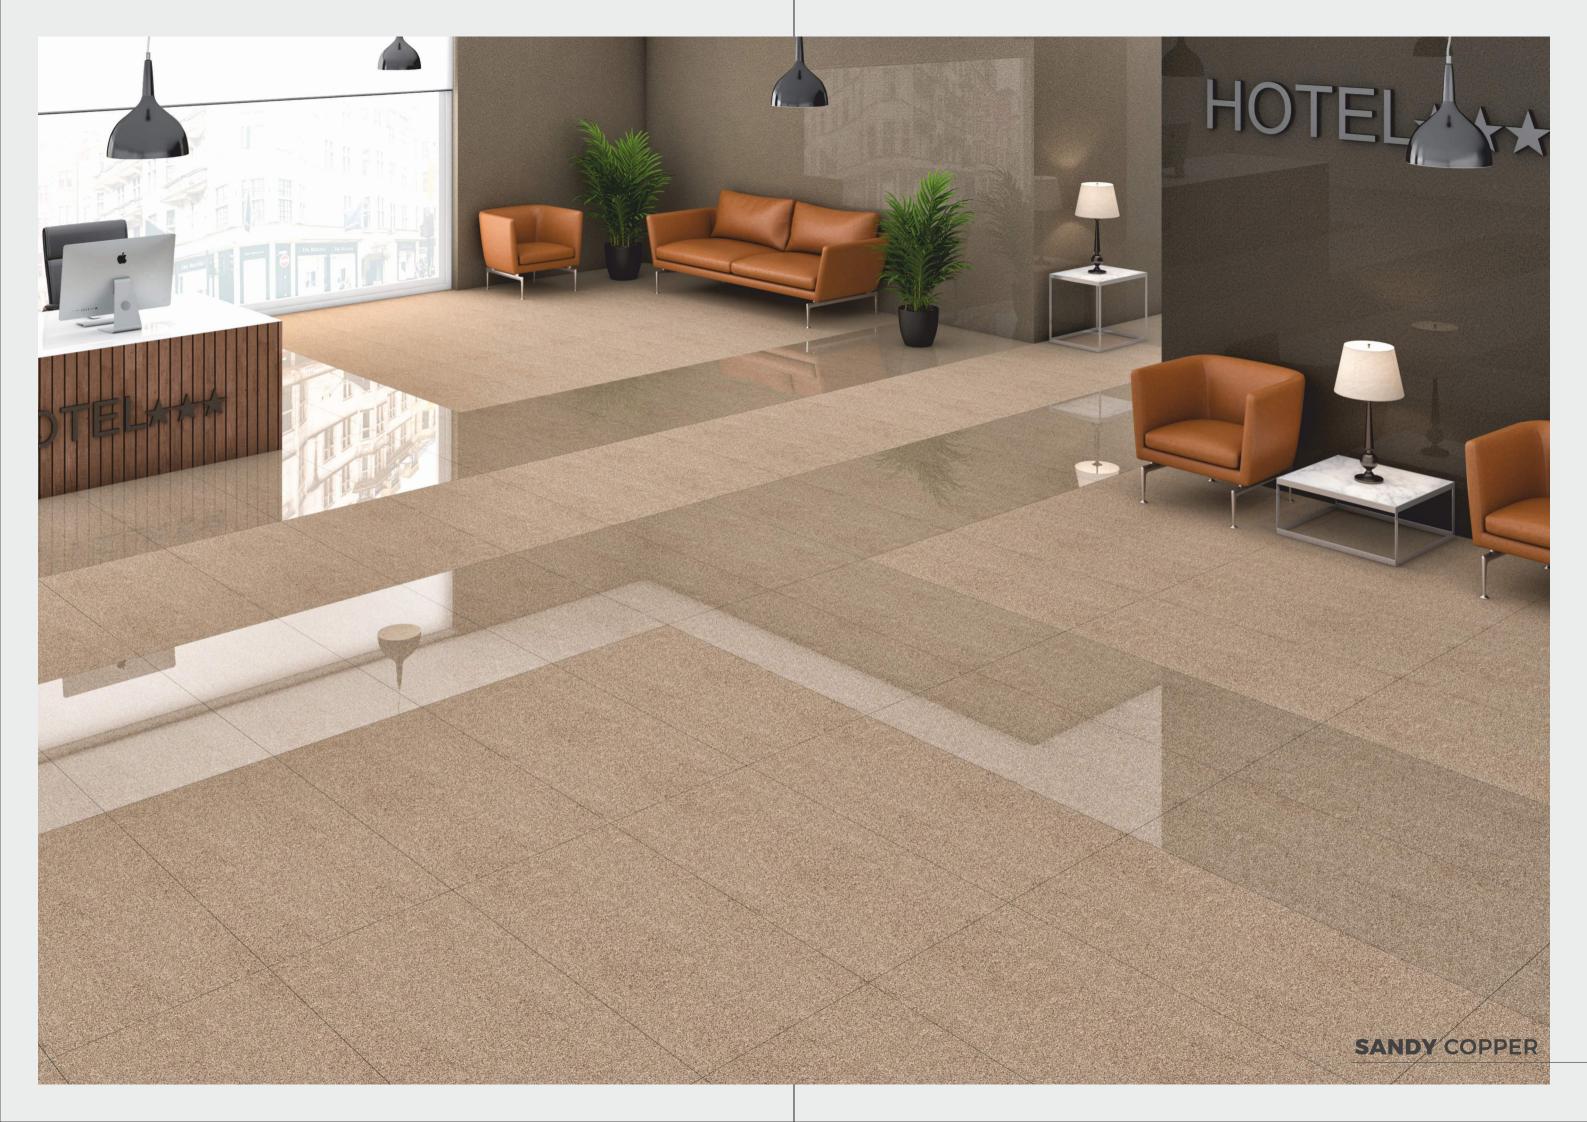





()










SANDY KOTA

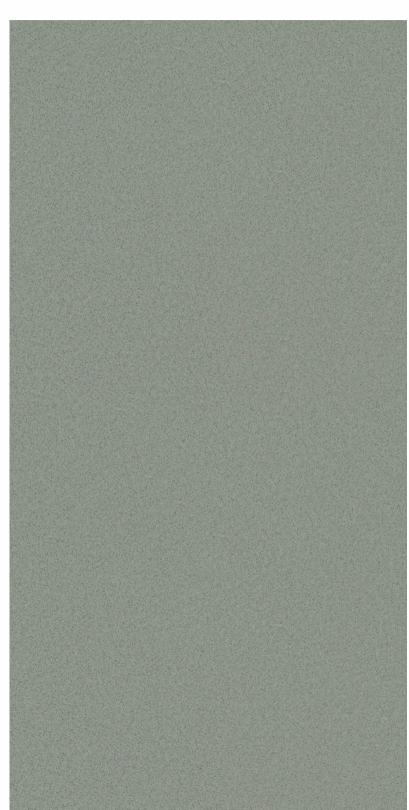

Dark Series



FORMAT

600 x 600 mm

600 x 1200 mm





SANDY KOTA


































SANDY VERDE

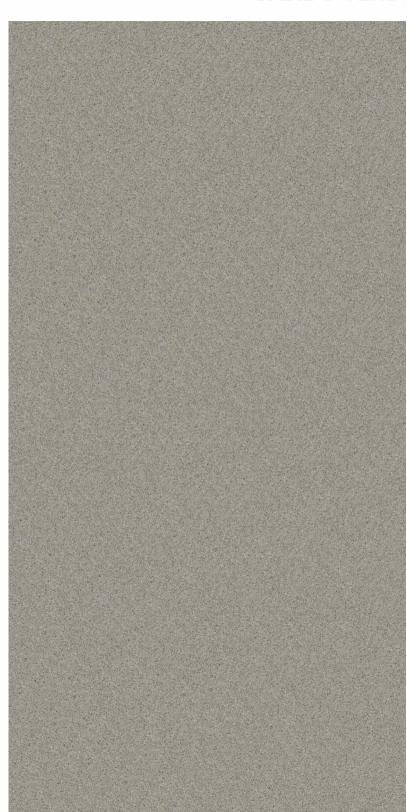

Dark Series



FORMAT

600 x 600 mm

600 x 1200 mm



SANDY VERDE

Available Surface
Satin / Polish





Floo Tile



Wa



Glos



Mat



Water Proof













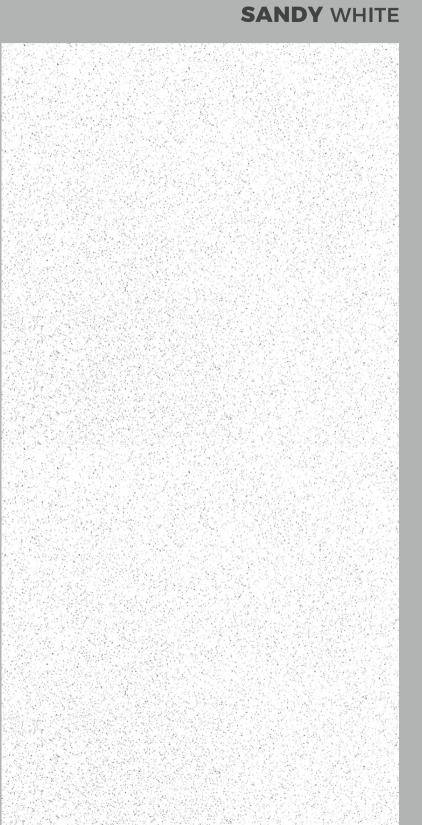

Special Series



FORMAT

600 x 600 mm

600 x 1200 mm




















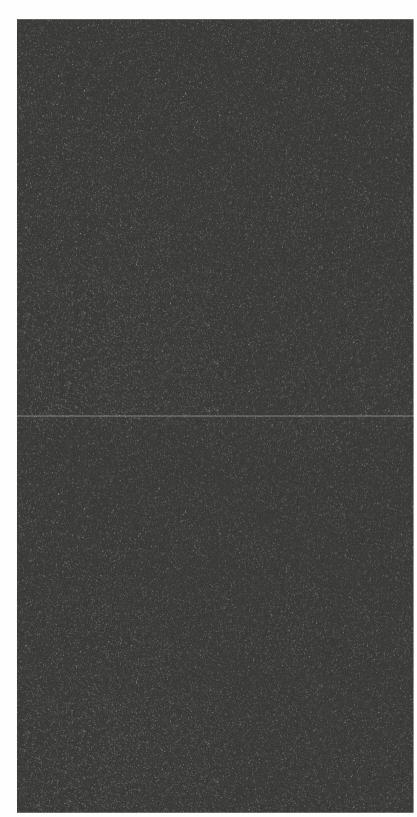

Super Special Series



FORMAT

600 x 600 mm

600 x 1200 mm



SANDY BLACK













Direct Installation On Grass

Ideal for: Gardens, gazebos, walkways.

- 1- Remove the soil below the area where the sheet will be laid to a thickness of about 5-6 cm
- 2- apply gravel to a thickness of about 3-4 cm and compact the foundation
- 3- Rest the sheets with at least 1 cm of gap on the gravel bed and use a rubber hammer to eliminate any unevenness.













WHEN HIN FO NW W WW W W

Installation On Gravel And Sand





LAYING DIRECTLY ON GRASS

Laying With Close Joints

Laying With Close Joints

B. Fine gravel or sandy laying bed


C. Ground

Installation On Gravel And Sand

Ideal for: gardens, patios, courtyards, pedestrian walkways, beach resorts, perimeter areas in pools.

- 1- Compact the level of the resting layer (sand or gravel)
- 2- Lay the sheet on the bed of gravel or sand, maintaining a minimum gap of 1 cm or wider
- 3- Use a rubber hammer to eliminate any unevenness
- 4- Fill in the joints between the sheets with gravel or sand to provide greater stability to the surface





- B. Fine gravel or sandy laying bed
- C. Concrete screed (may include electro welded mesh)
- D. Reinforcement layer
- E. Concrete screed
- F. Loose stone foundation (gravel)
- G. Soil

TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP Bla	MEAN VALUE OF OUR FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	±0.60%	±0.10%	ISO-10545-2
Deviation In Thickness	±5.00%	±2.00%	ISO-10545-2
Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
Rectangularity	±0.60%	±0.10%	ISO-10545-2
Surface Flatness	±0.50%	±0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossmeter
Water Absorption	≤0.50%	E≤0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm ³	Max. 145mm³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN 101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nill	Nill	ISO-10545-10
Thermal Expansion	<9x10- ⁶	≥ 6 x 10- ⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance (friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

 $Icon \ reserves \ the \ right to \ delete \ \& \ amend \ either \ totally, or \ partially, any \ of \ the \ colors, \ shapes, \ sizes, \ references \ and \ other \ technical \ specifications \ contained \ in \ this \ catalogue$ at anytime. The colors of tiles shown in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.

PACKING DETAILS

	SIZE	Pcs. / Box	Weight / Box (Approx.)		Coverage Area / Box	
			Matt	Polished	Coverage Area / Box	
FULL BODY	600 x 1200 mm	2 pcs.	27.5-28 Kg	26-26.5 Kg	15.5 / Sq. Feet	1.44 / Mtr ²
	600 x 600 mm	4 pcs.	29.5-30 Kg	27-27.5 Kg	15.5 / Sq. Feet	1.44 / Mtr²

THANK YOU