


STONER

S E R I E S


600x
600 mm




Thickness
In mm
16



ANTIBACTERIAL ANTIVIRAL




High quality combined with unrivalled technology has enabled us to re-interpret some of the rarest

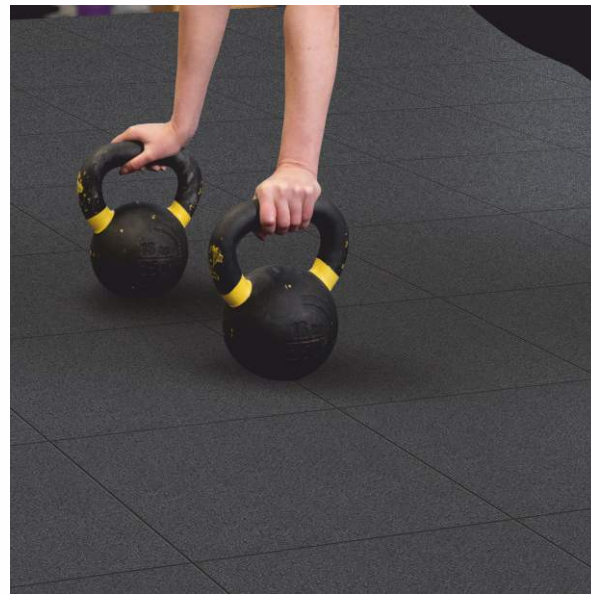

DURABLE



High quality combined with unrivalled technology has enabled us to re-interpret some of the rarest

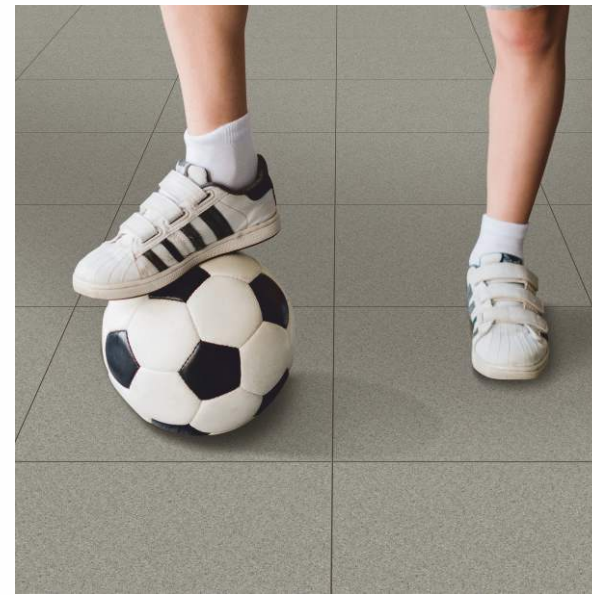

ANTI SLEEP




High quality combined with unrivalled technology has enabled us to re-interpret some of the rarest



EASY TO CLEAN



High quality combined with unrivalled technology has enabled us to re-interpret some of the rarest

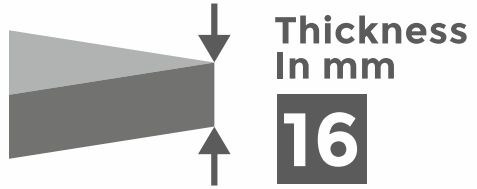

STONER
SERIES

Stoner Ivory

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm** | **LIGHT**
Series

Stoner Ivory & Stoner Choco



Floor
Tiles



Gloss
Finish




Rustic
Finish



Water
Proof

STONER
SERIES

600 x 600 mm

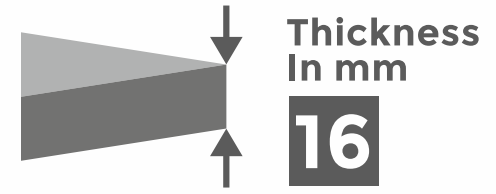

STONER
SERIES

Stoner Dove

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm**

LIGHT
Series

Stoner Dove



Floor Tiles



Gloss Finish





Rustic Finish



Water Proof

STONER
SERIES

600 x 600 mm

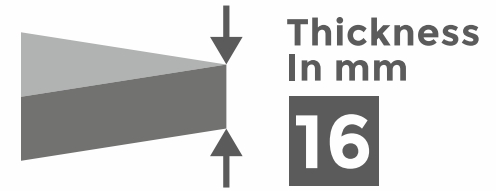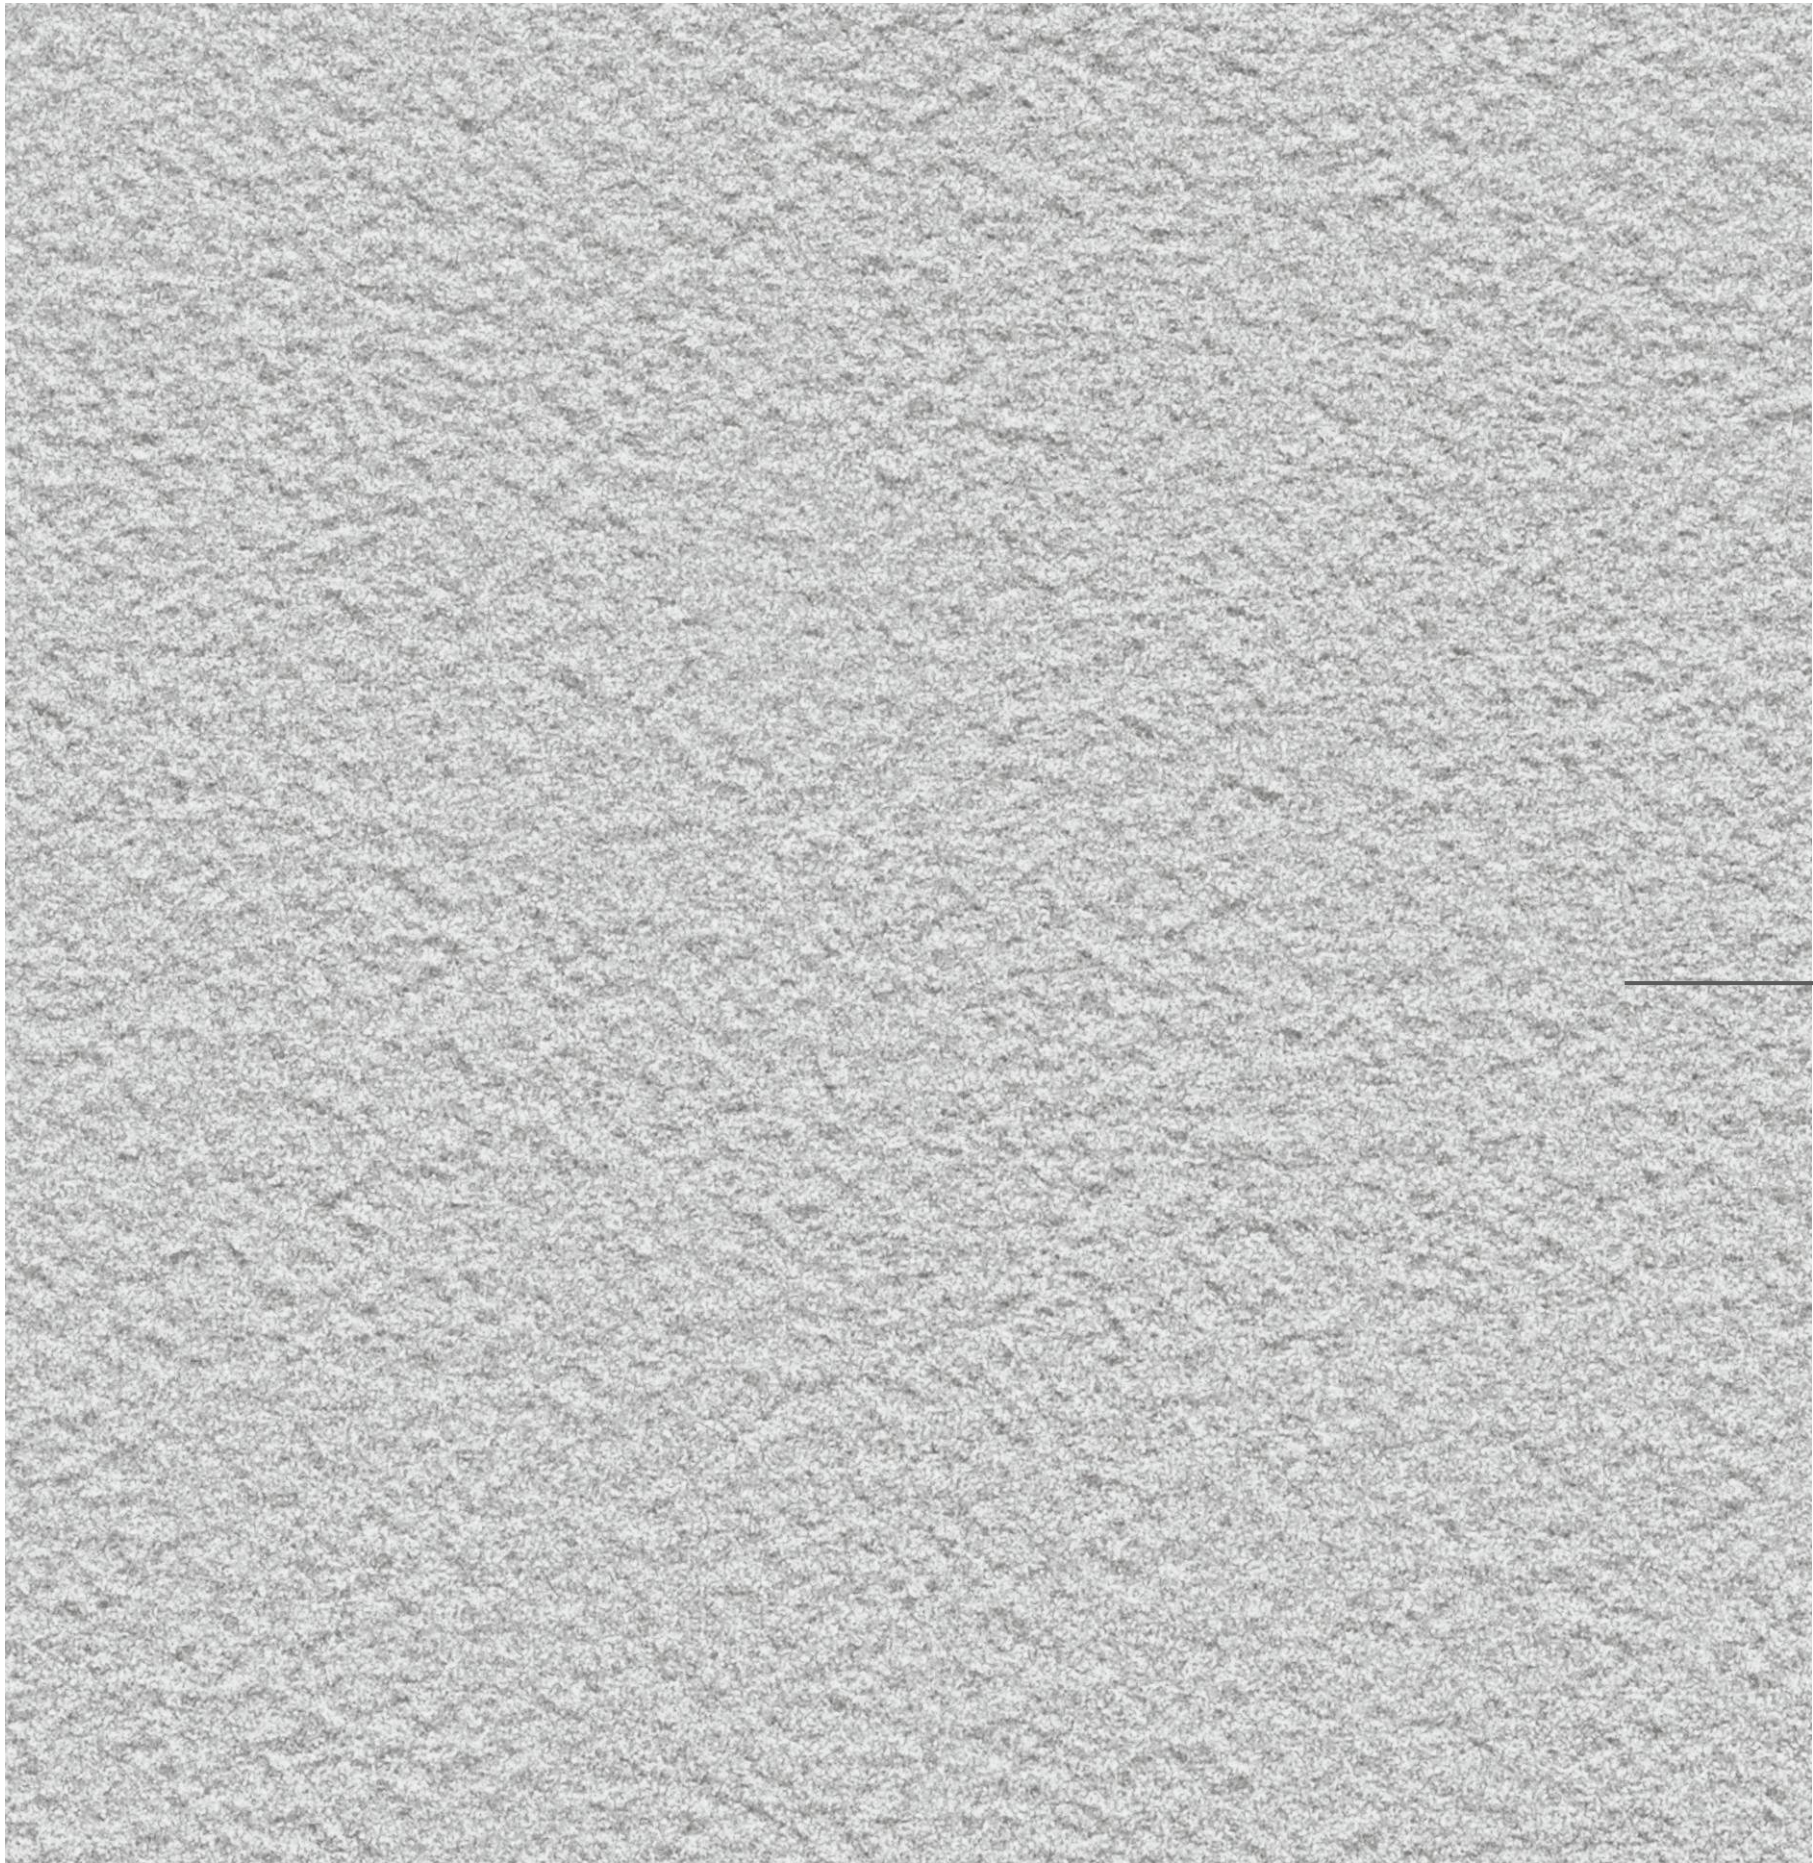

STONER
SERIES


Stoner Pearl

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm**

LIGHT
Series

Stoner Pearl

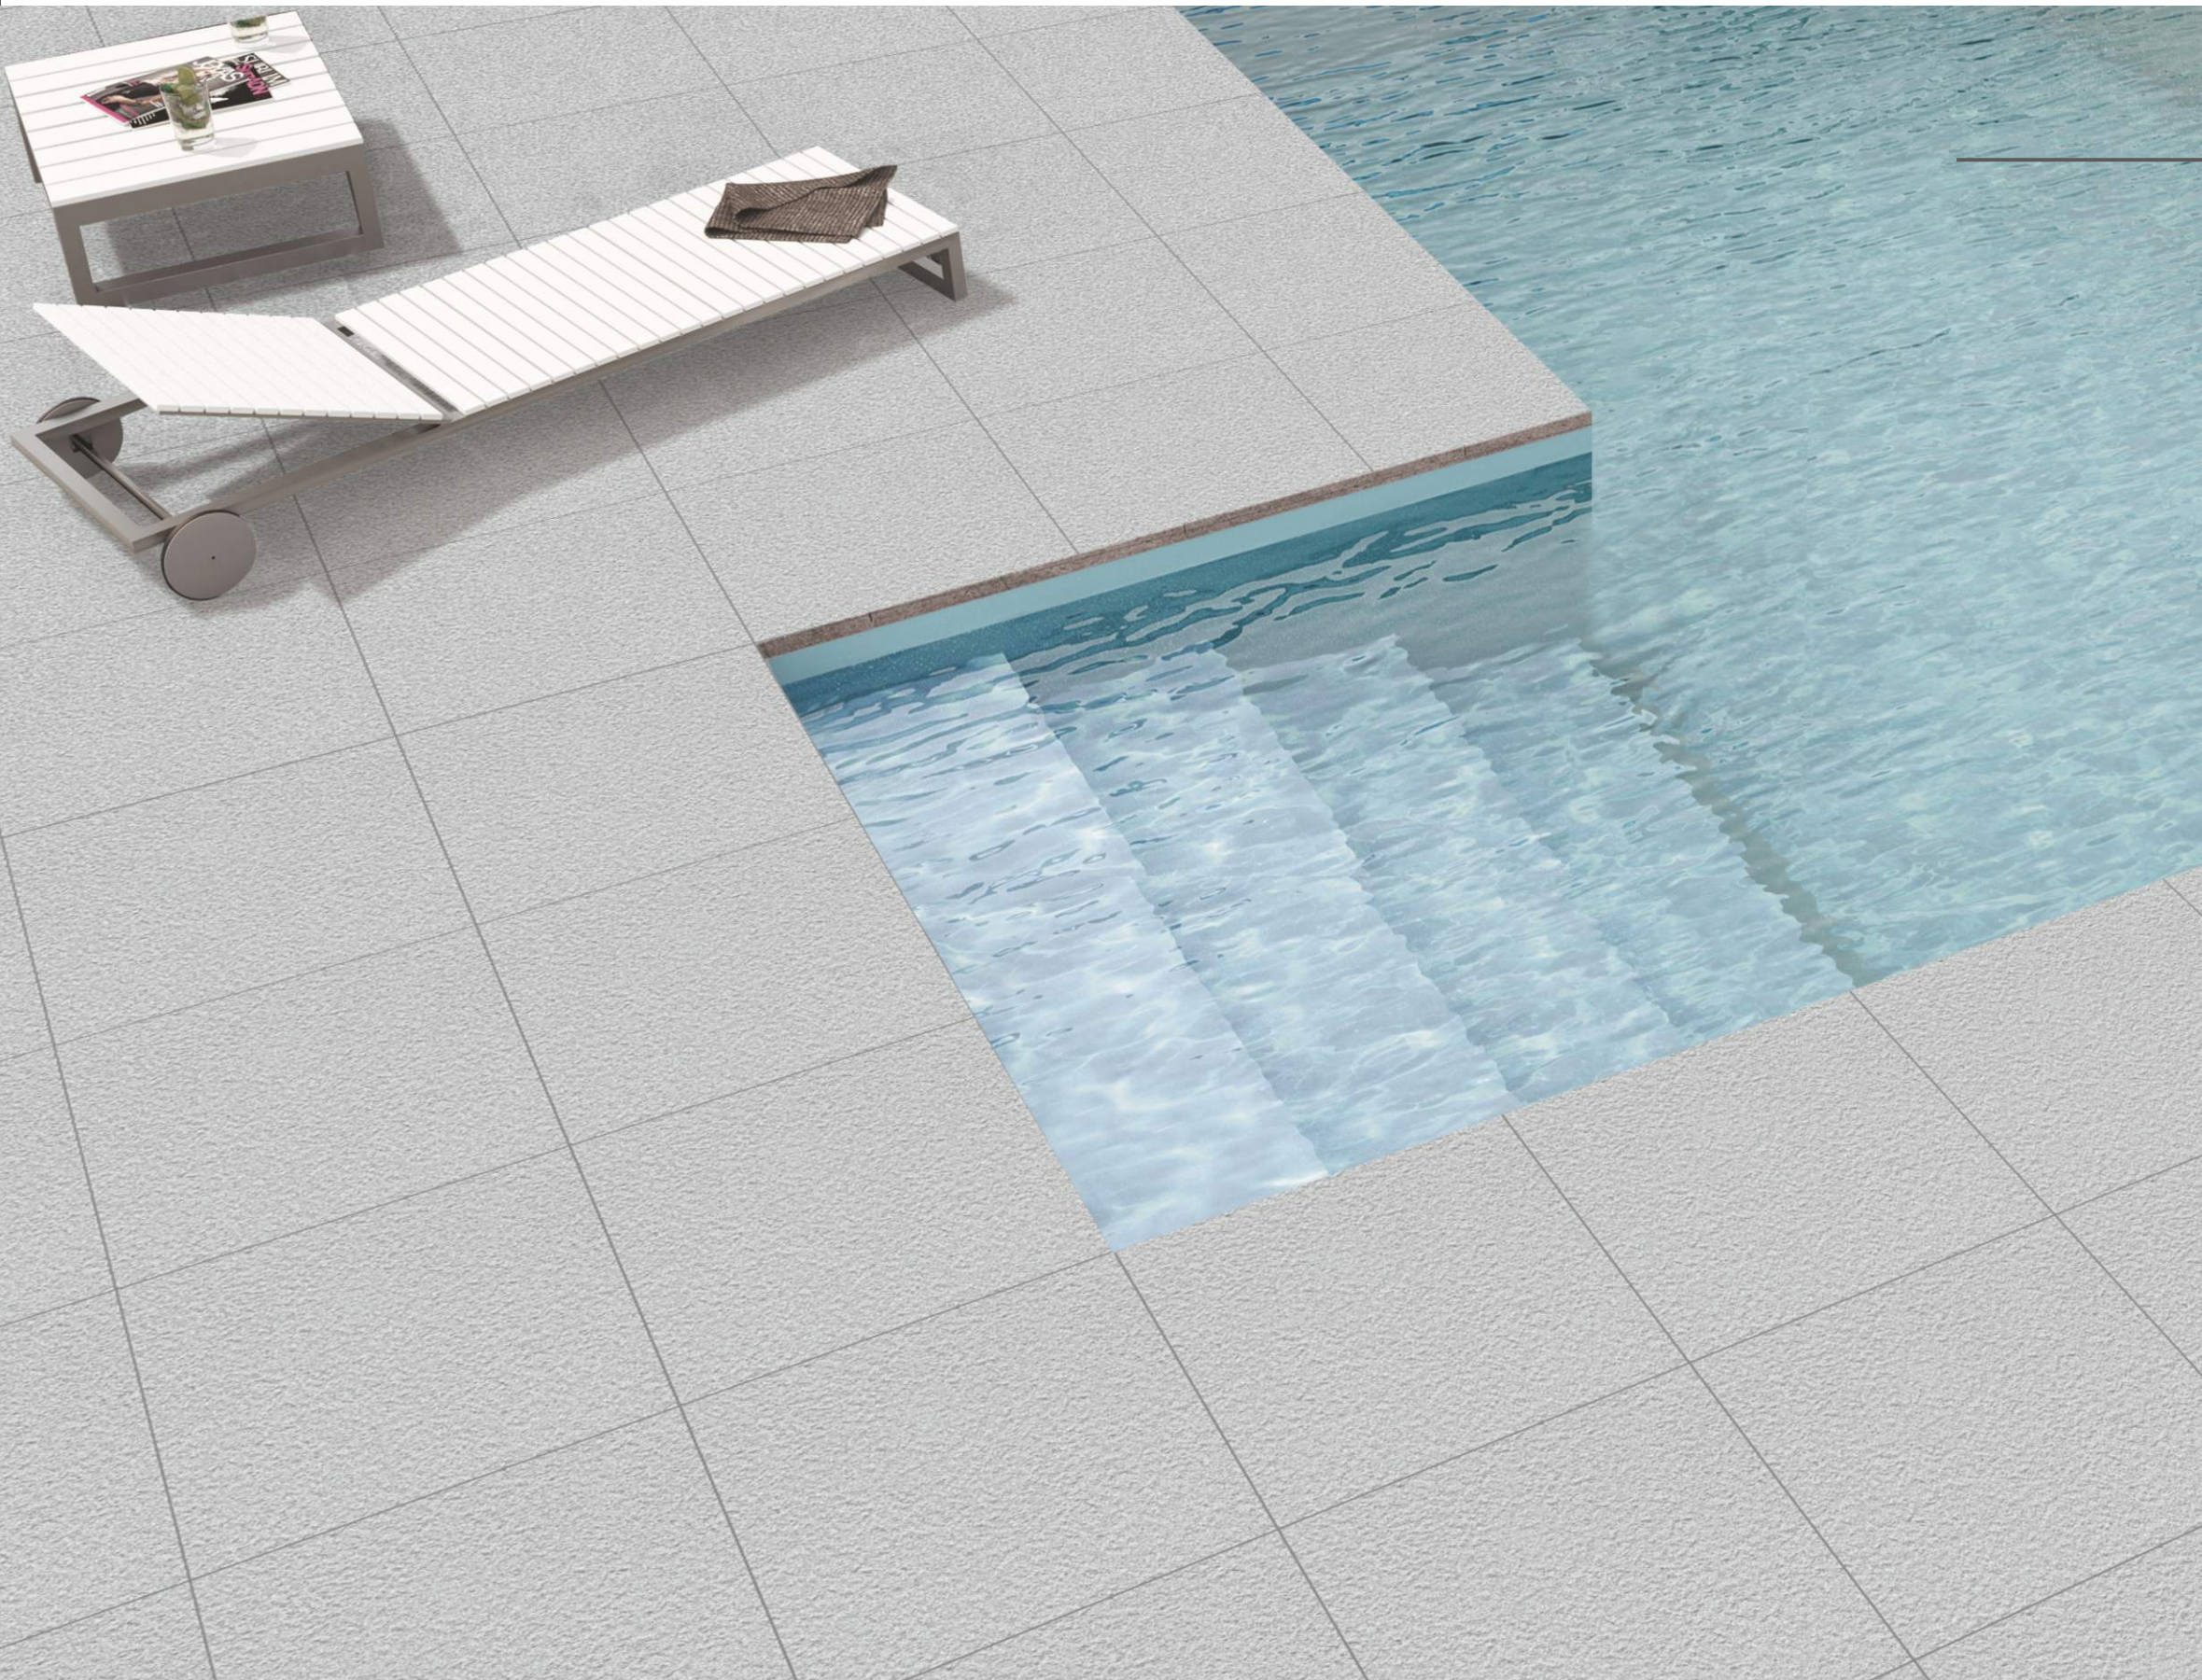

Floor
Tiles



Gloss
Finish




Rustic
Finish



Water
Proof

600 x 600 mm

STONER
SERIES

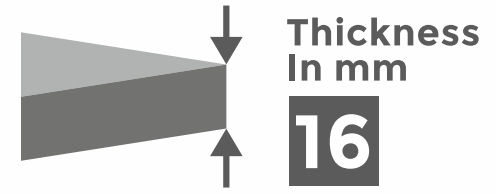

STONER
SERIES

Stoner Grey

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm**

LIGHT
Series

Stoner Grey



Floor
Tiles



Gloss
Finish




Rustic
Finish



Water
Proof

600 x 600 mm

STONER
SERIES

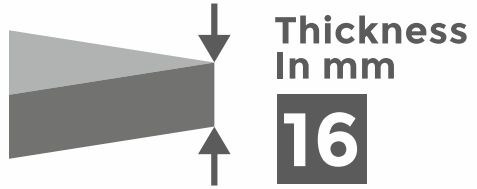

STONER
S E R I E S

Stoner Olive

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm** | **LIGHT**
Series

Stoner Olive



Floor
Tiles



Gloss
Finish





Rustic
Finish



Water
Proof

600 x 600 mm

STONER
SERIES

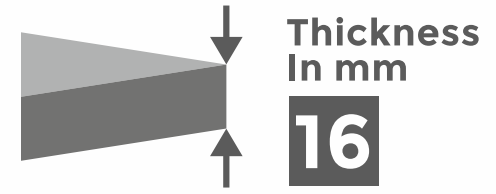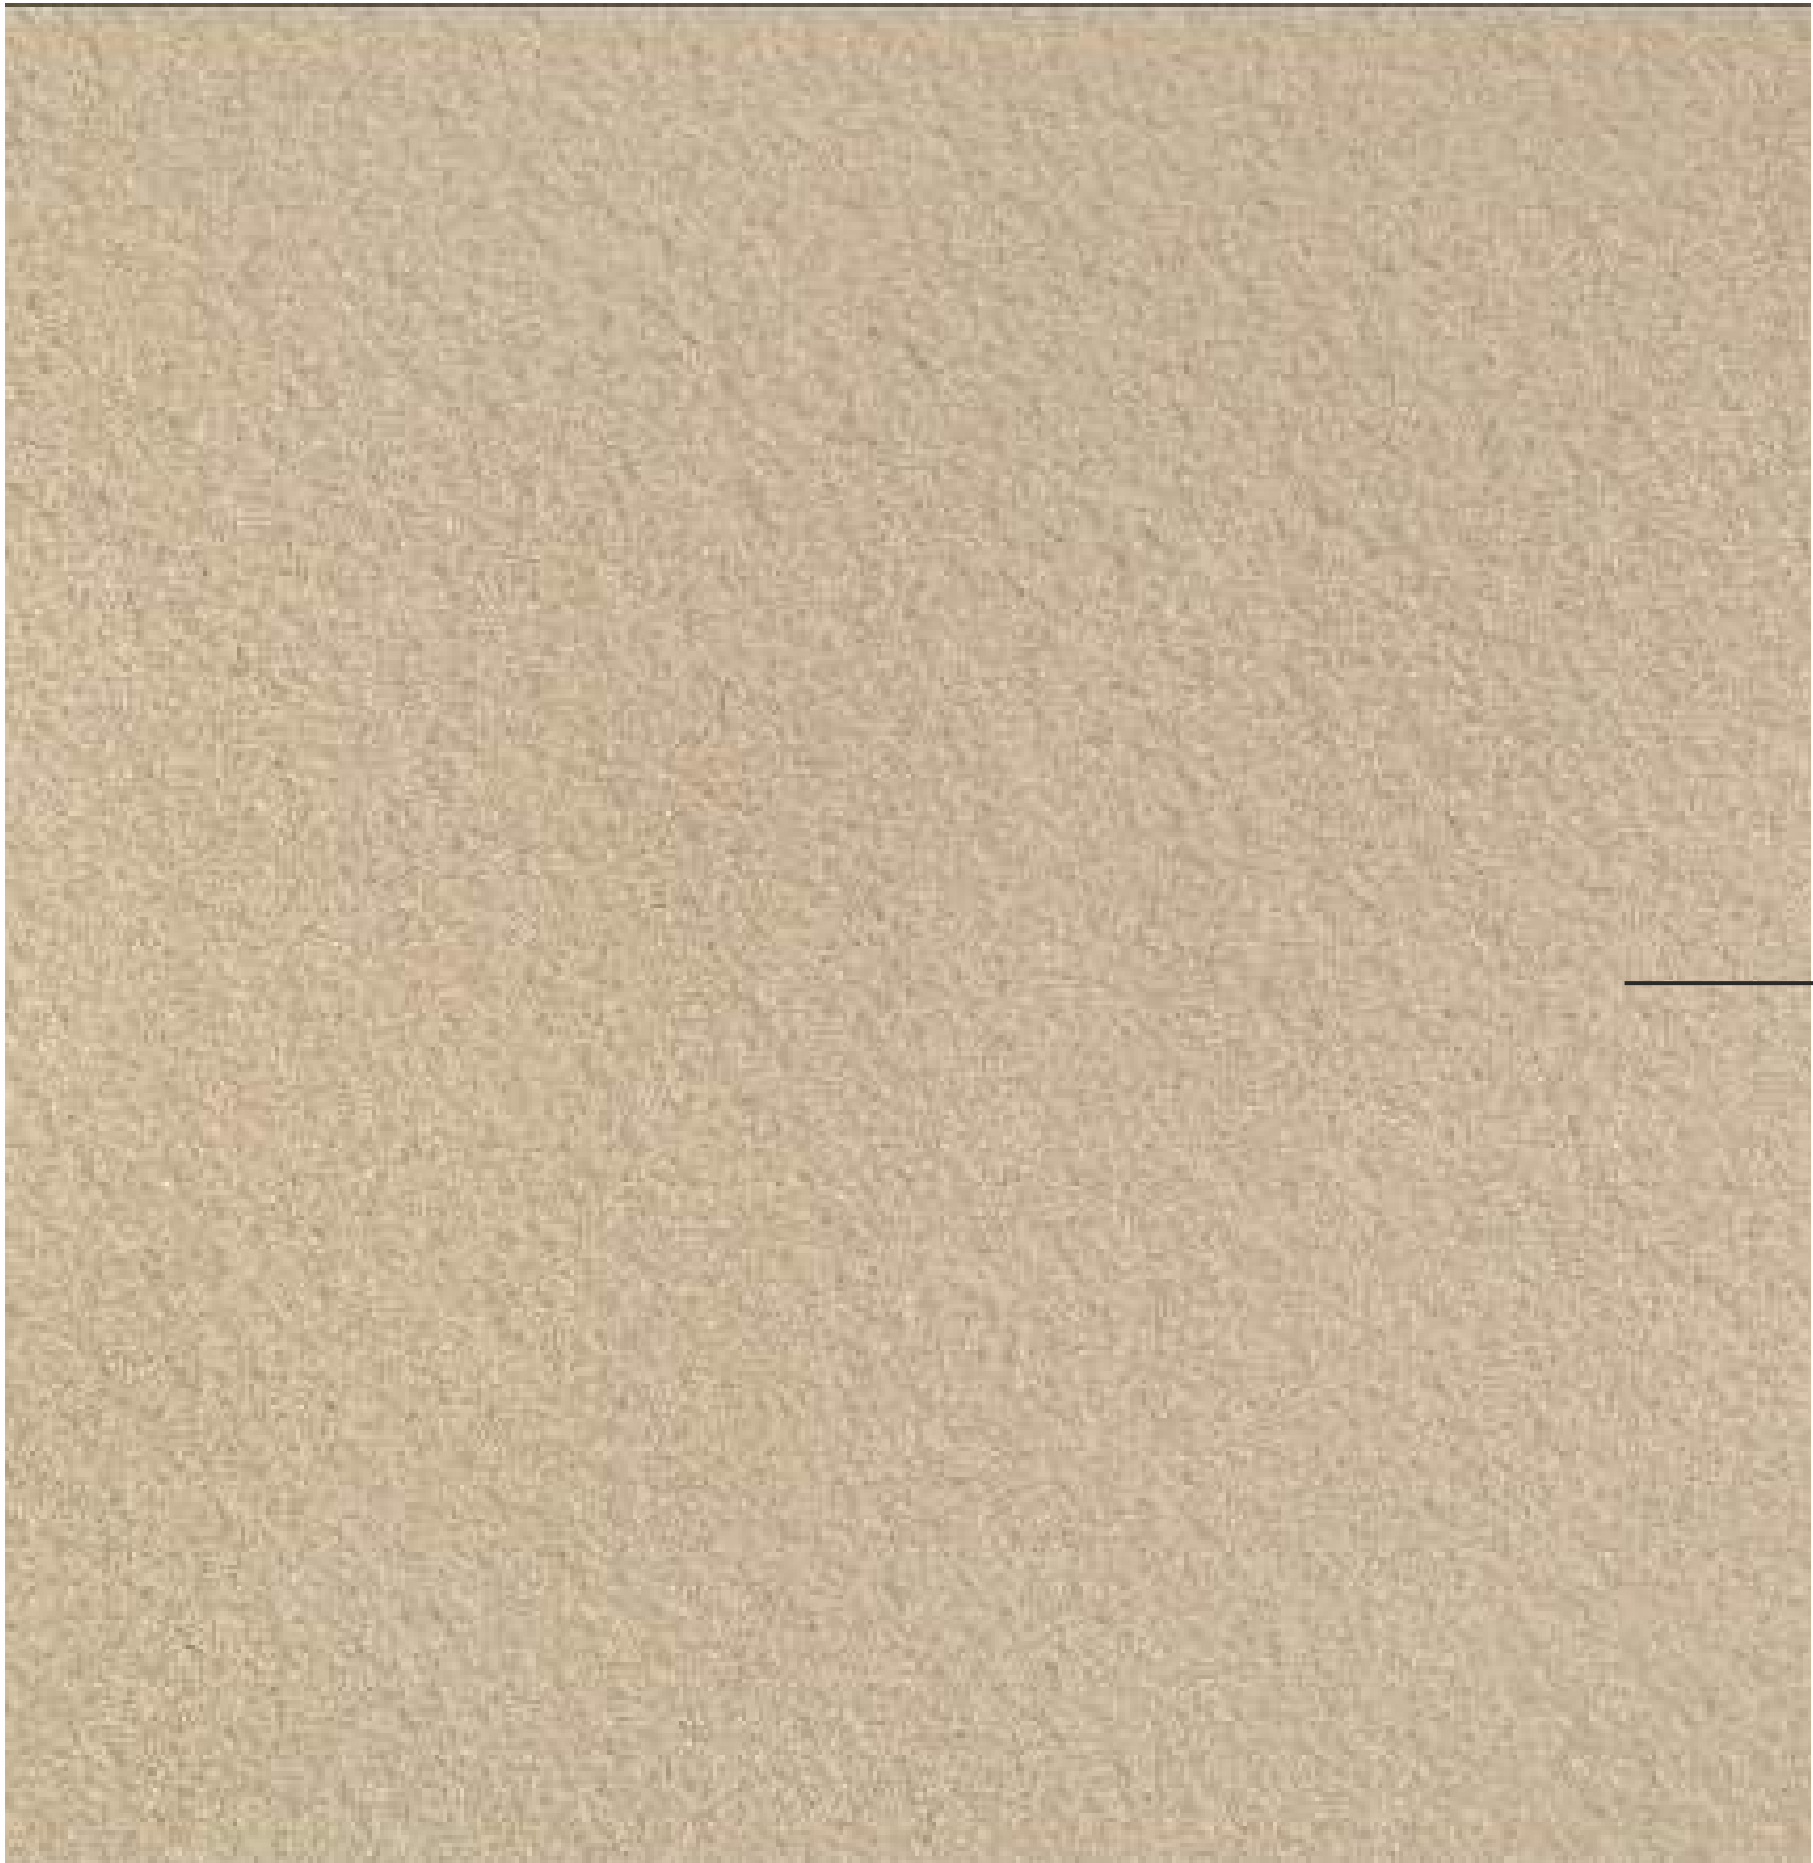

STONER
SERIES

Stoner Beige

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm**

LIGHT
Series

Stoner Beige



Floor
Tiles



Gloss
Finish





Rustic
Finish



Water
Proof

STONER
S E R I E S

600 x 600 mm

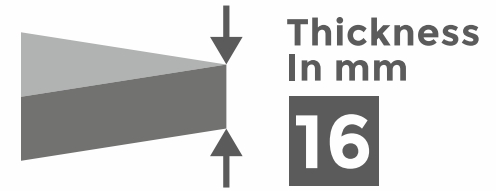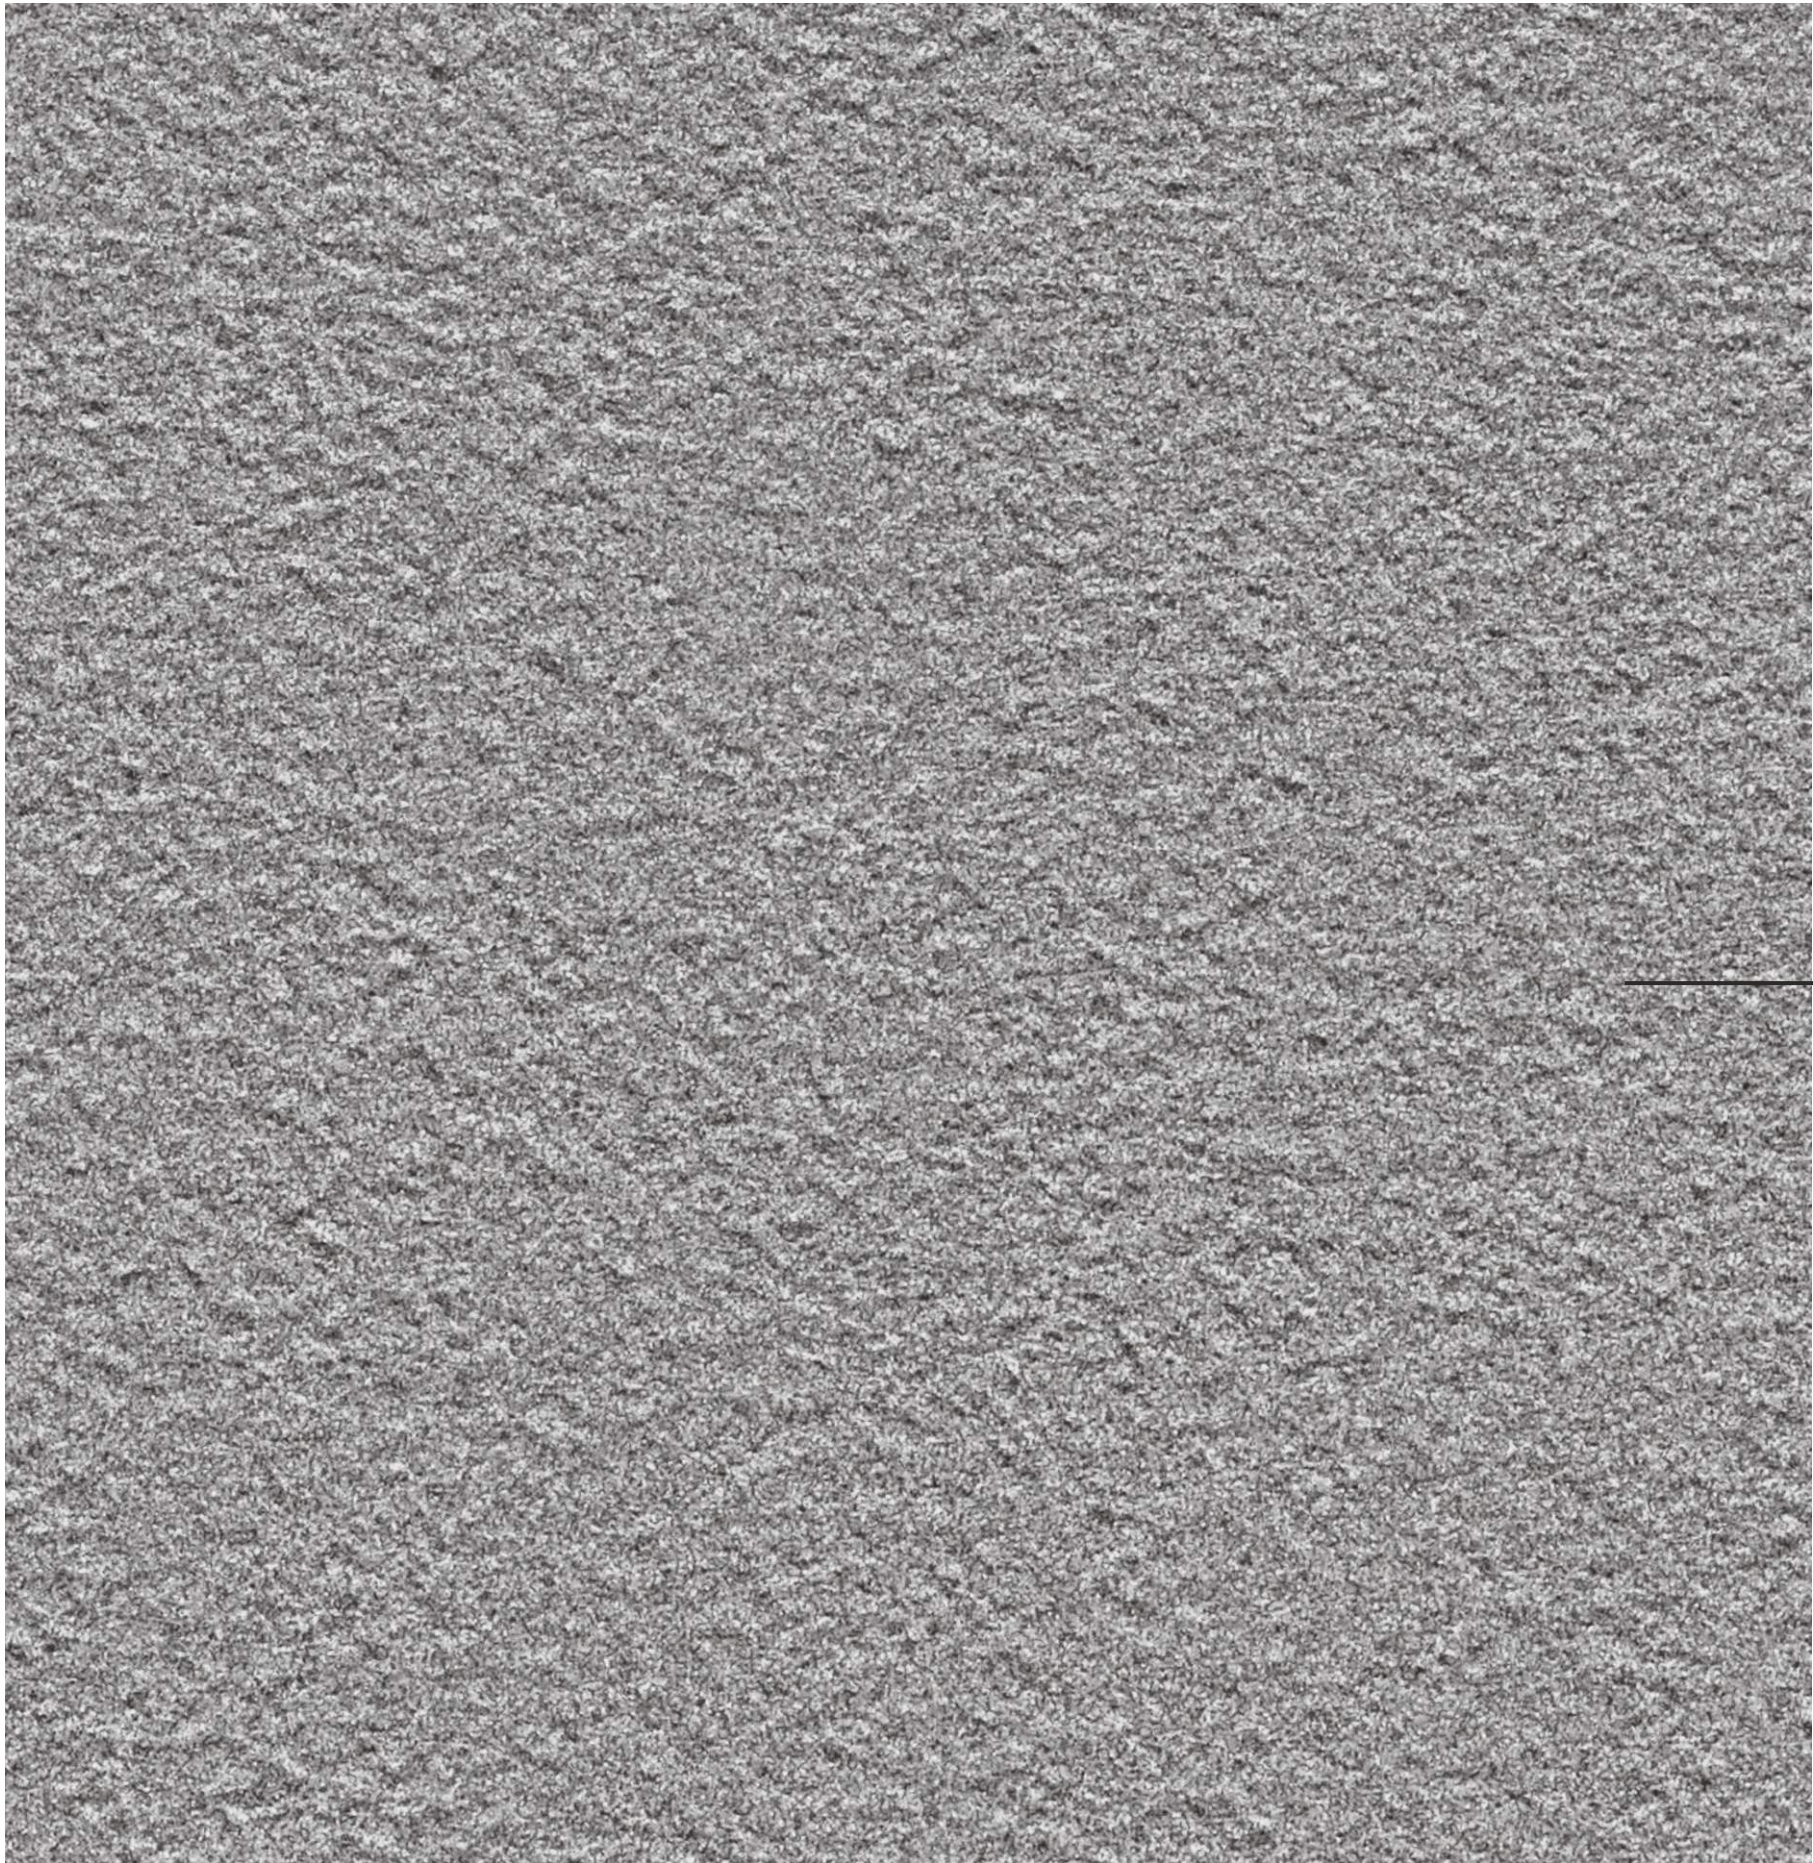

STONER
S E R I E S


Stoner Nero

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm**

DARK
Series

Stoner Nero

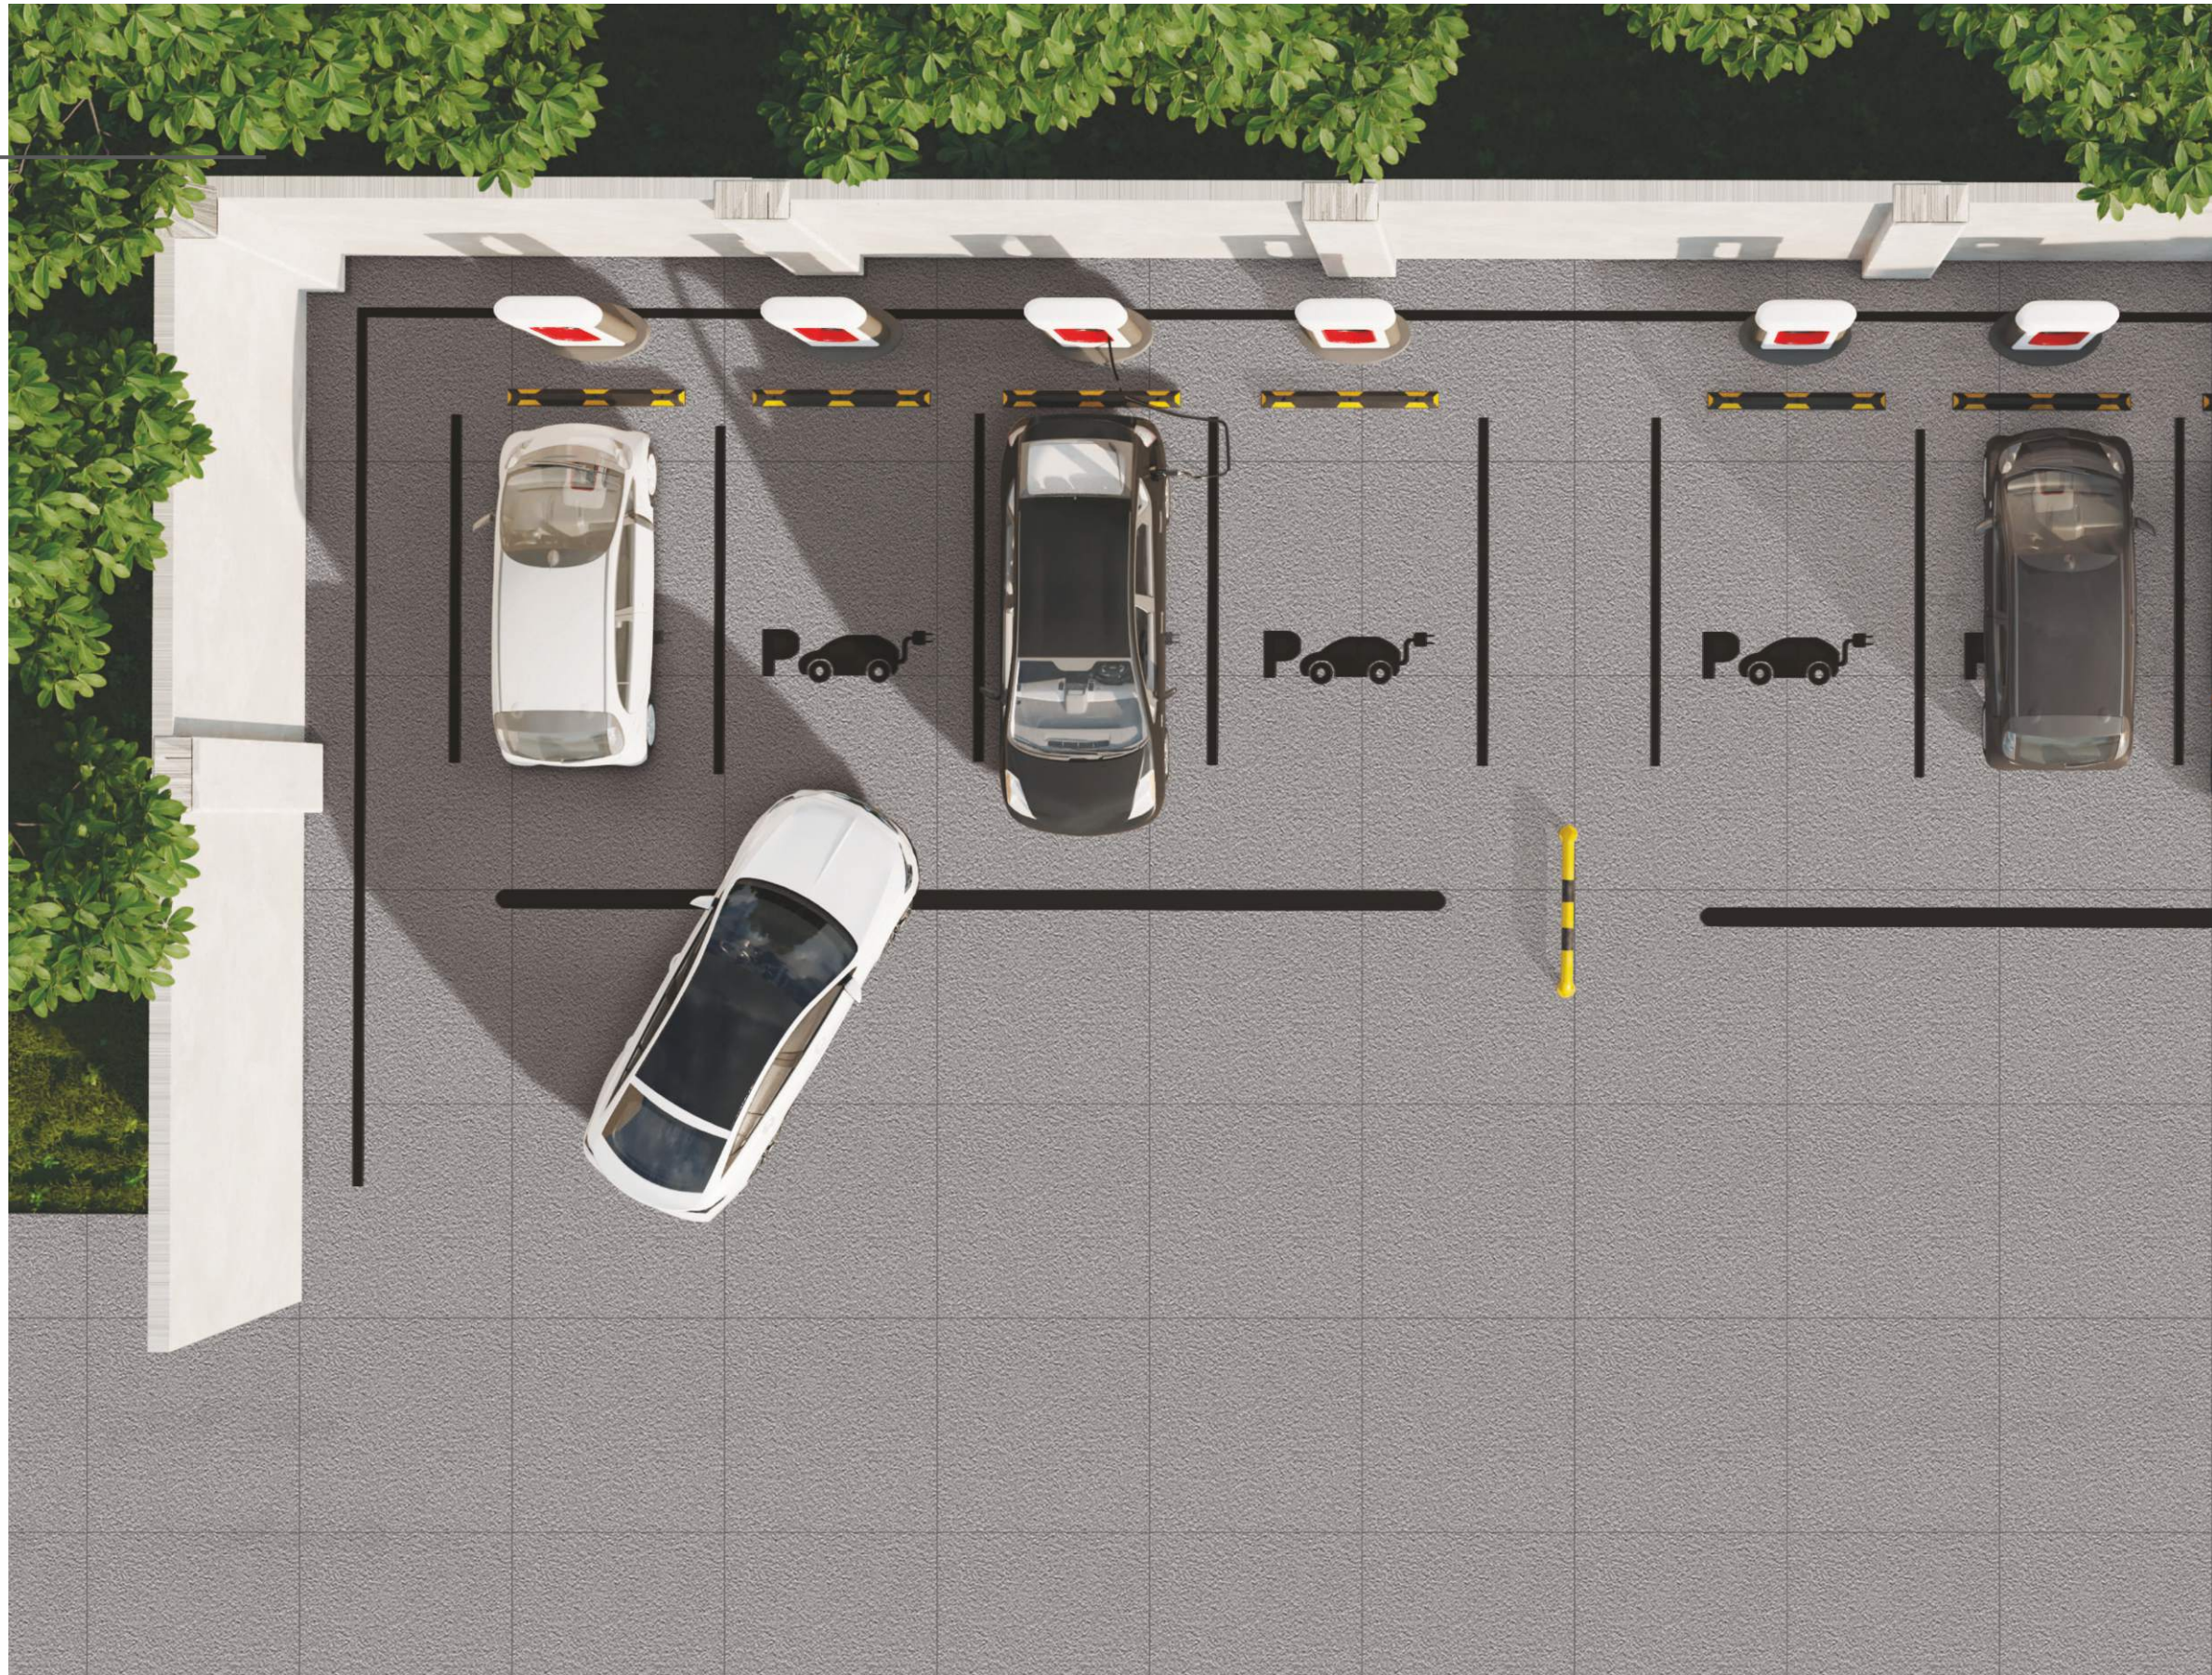

Floor Tiles



Gloss Finish




Rustic Finish



Water Proof

STONER
S E R I E S

600 x 600 mm

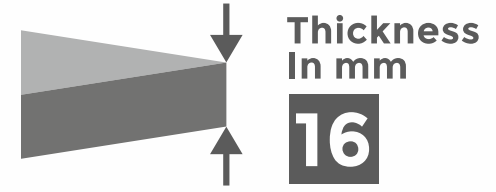

STONER
SERIES

Stoner Choco

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm**

DARK
Series

Stoner Choco & Stoner Ivory



Floor
Tiles



Gloss
Finish





Rustic
Finish



Water
Proof

600 x 600 mm

STONER
SERIES

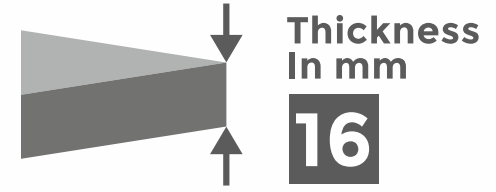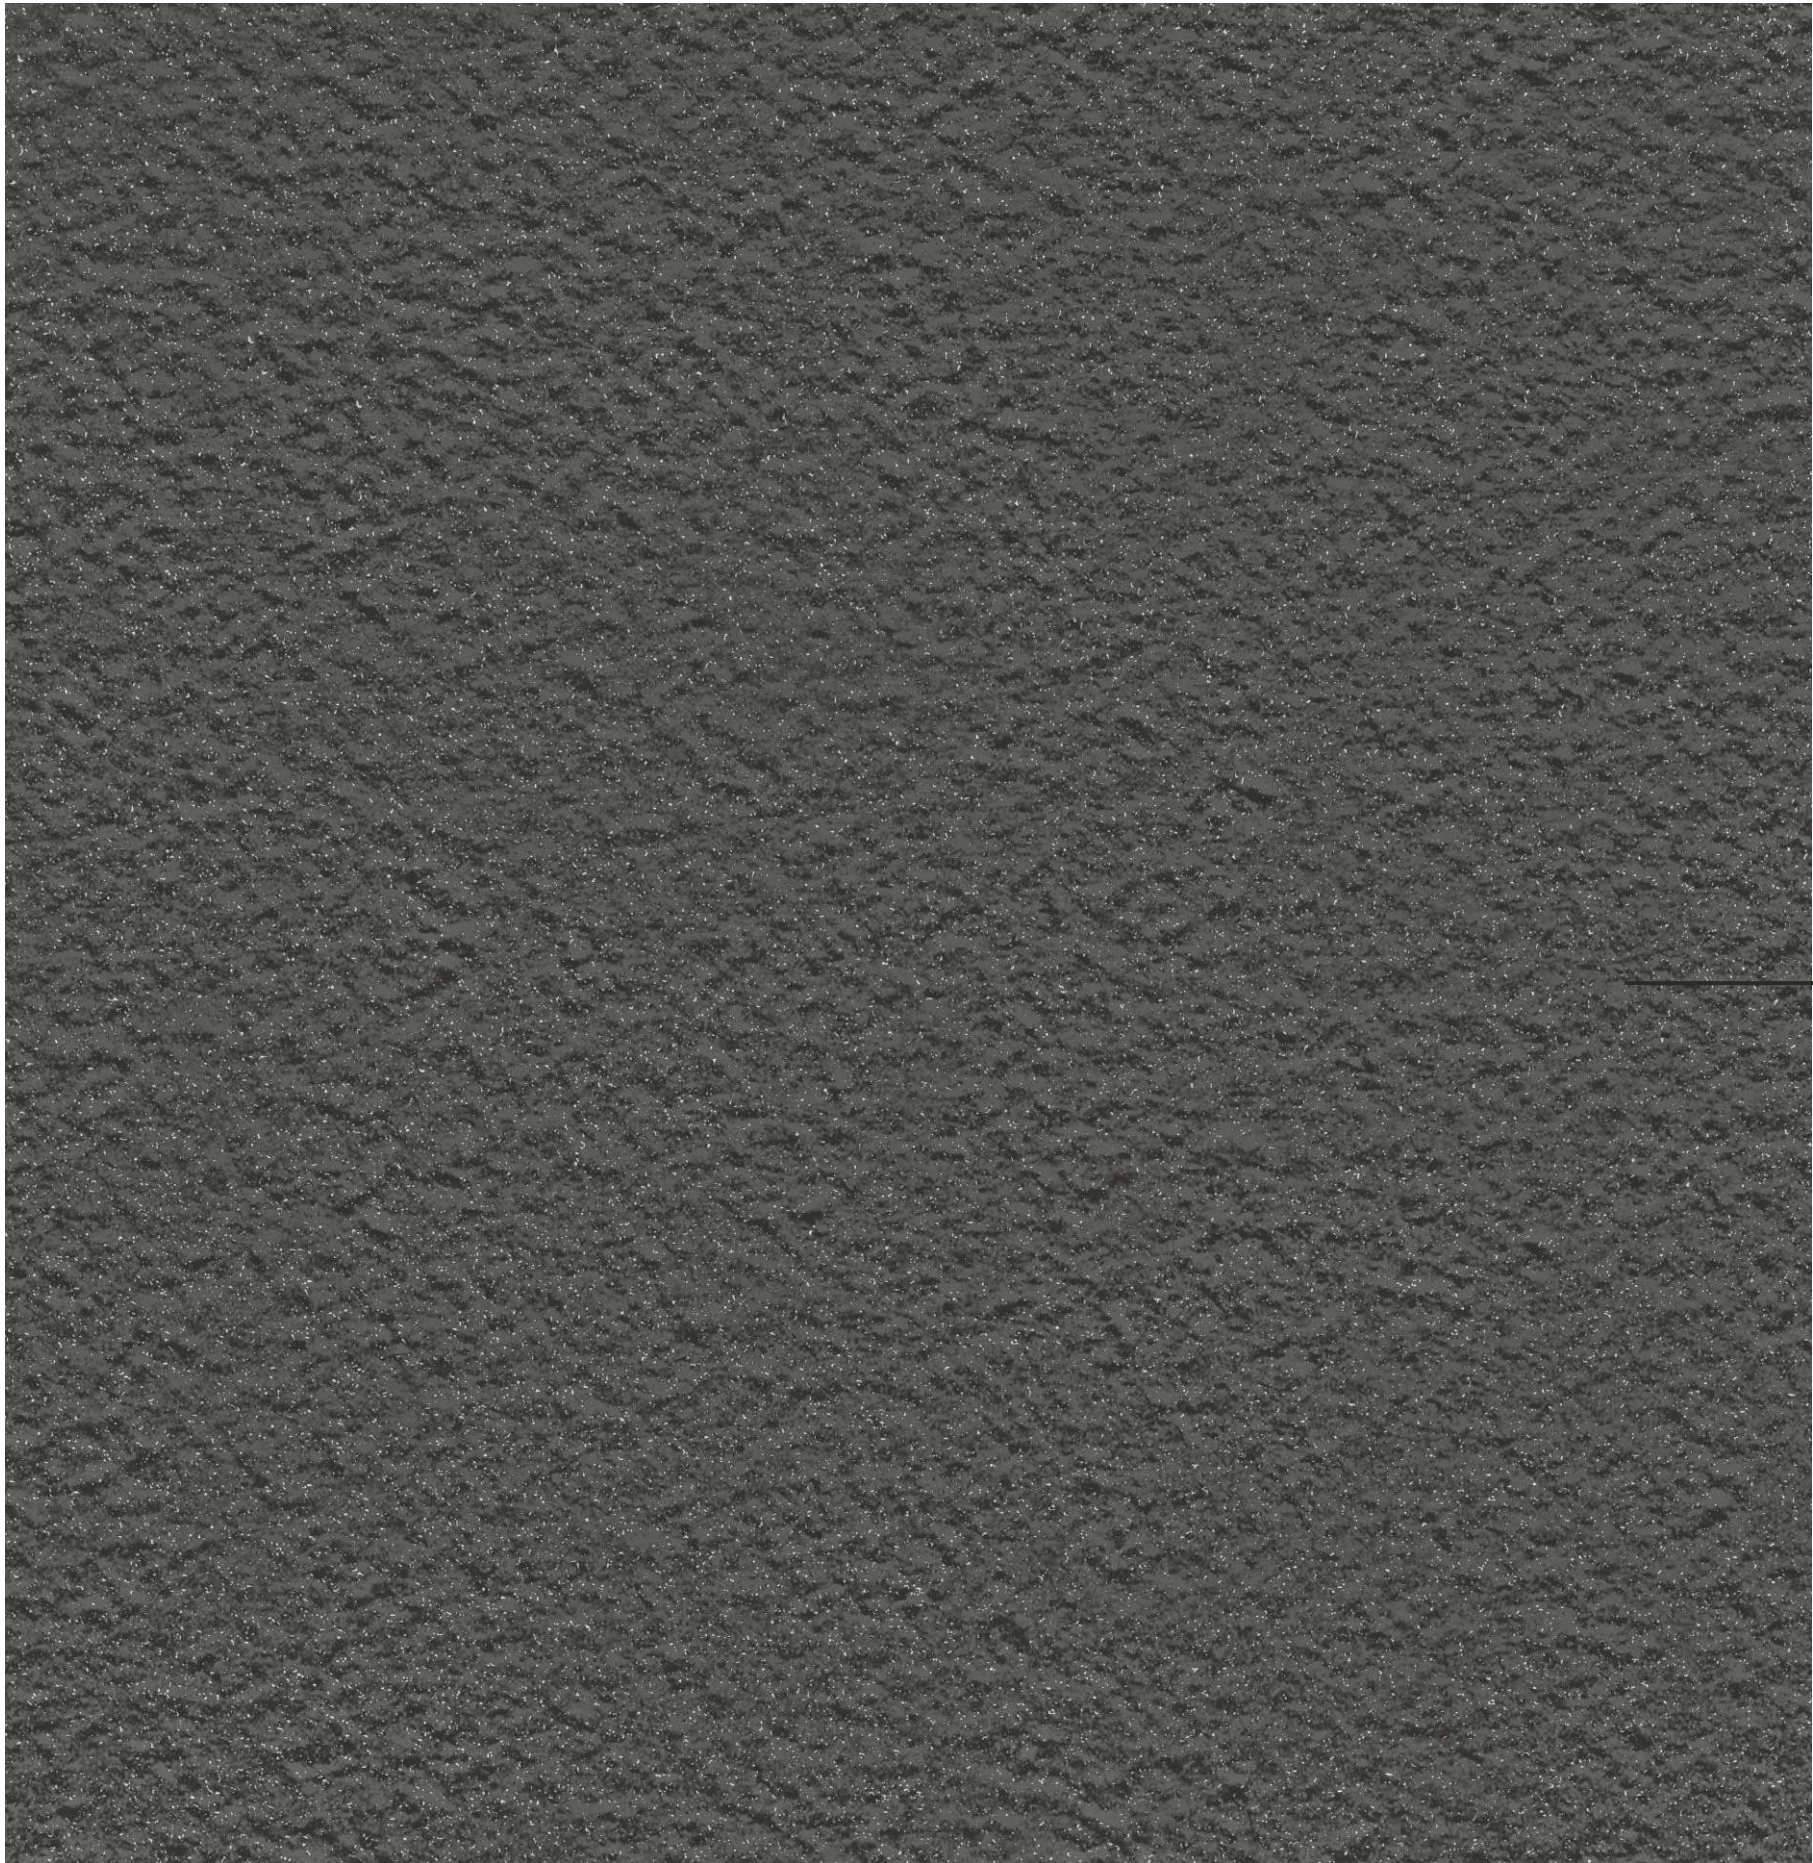

STONER
S E R I E S

Stoner Black

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm**

DARK
Series

Stoner Black



Floor
Tiles



Gloss
Finish




Rustic
Finish



Water
Proof

STONER
SERIES

600 x 600 mm

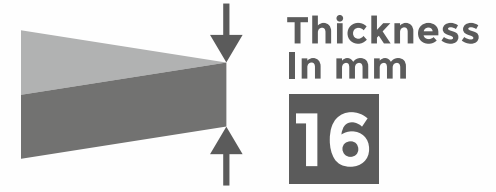

STONER
SERIES

Stoner Verde

**FULL
BODY**
VITRIFIED TILES

**600x
600 mm**

DARK
Series

Stoner Verde



Floor
Tiles



Gloss
Finish



Rustic
Finish



Water
Proof


STONER
SERIES

600 x 600 mm


Direct Installation On Grass

Ideal for: Gardens, gazebos, walkways.

- 1- Remove the soil below the area where the sheet will be laid to a thickness of about 5-6 cm
- 2- apply gravel to a thickness of about 3-4 cm and compact the foundation
- 3- Rest the sheets - with at least 1 cm of gap - on the gravel bed and use a rubber hammer to eliminate any unevenness.

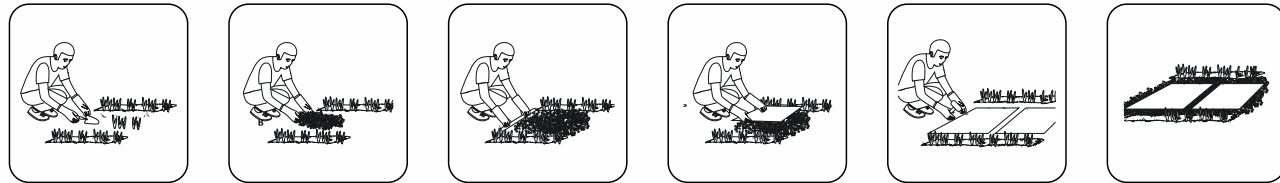


Installation On Gravel And Sand

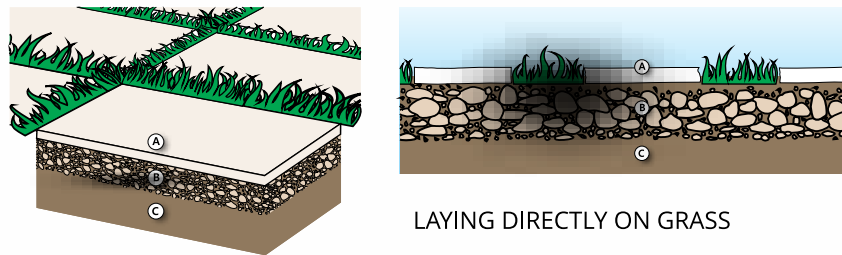

LAYING DIRECTLY ON GRASS

Laying With Close Joints



Laying With Close Joints




- A. Tile
- B. Fine gravel or sandy laying bed
- C. Ground

Installation On Gravel And Sand

Ideal for: gardens, patios, courtyards, pedestrian walkways, beach resorts, perimeter areas in pools.

- 1- Compact the level of the resting layer (sand or gravel)
- 2- Lay the sheet on the bed of gravel or sand, maintaining a minimum gap of 1 cm or wider
- 3- Use a rubber hammer to eliminate any unevenness
- 4- Fill in the joints between the sheets with gravel or sand to provide greater stability to the surface

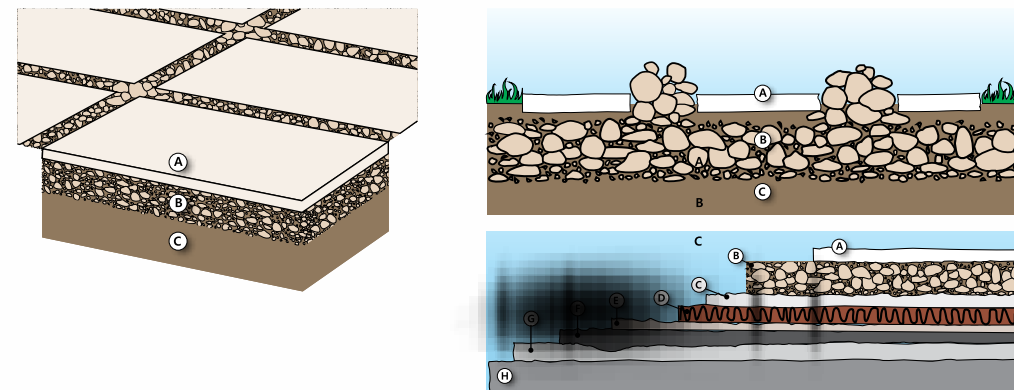

- A. Tile
- B. Fine gravel or sandy laying bed
- C. Concrete screed (may include electro welded mesh)
- D. Reinforcement layer
- E. Concrete screed
- F. Loose stone foundation (gravel)
- G. Soil

Technical Specification

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	+ 5.00%	+2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	+ 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossometer
Water Absorption	≤ 0.50%	E ≤ 0.03%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 × 10 ⁻⁶	< 6 × 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance(friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

Packing Detail

SIZE	THICKNESS	PCS./BOX	WEIGHT / BOX (Approx)	COVERAGE AREA / BOX
600x600mm	16MM	2 Pcs.	25 Kgs.	1.44 mtr ²

THANK YOU